
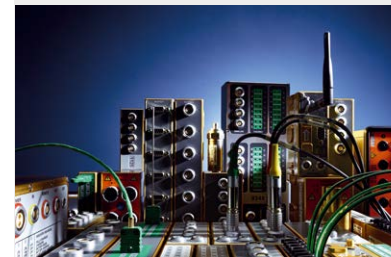


## Product Highlights

# Content

## IPETRONIK Product Highlights

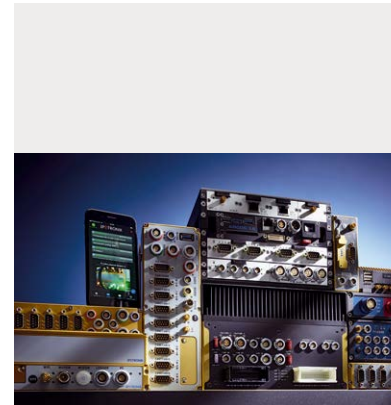

<b>Content</b> .....	<b>1</b>
Products IPEmeasure .....	2
Products IPEmotion .....	3
<b>Data Logger</b> .....	<b>5</b>
Data Logger Overview .....	8
Packages & Upgrades .....	12
<b>Satellites and Accessories</b> .....	<b>14</b>
Data Transfer Station/DriveBay .....	18
<b>Modules</b> .....	<b>20</b>
Flow Linearization/M-FLOW .....	26
<b>High Voltage</b> .....	<b>29</b>
<b>Sensors</b> .....	<b>36</b>
<b>Software</b> .....	<b>40</b>
<b>IPEServices</b> .....	<b>47</b>
<b>Contact</b> .....	<b>50</b>

## Products IPEmeasure

### Data Loggers and Modules




\*This image does not correspond to the regular use case

#### Modular Signal Conditioning up to 400 kHz

- ▶ IP 67
- ▶ -40 to 125°C (-40 to 257°F)
- ▶ Thermal, Voltage, Current, Strain, Frequency, RTD, HV, Microphone, Piezo, IEPE, Accelerometer

#### Remote Data Logging

- ▶ CAN FD, LIN, Automotive Ethernet
- ▶ Protocols & Diagnostics: XCP | CCP | UDS | J1939 | OBD | WWH-OBD | ARC429 | Profibus | Serial | Ethernet | EtherCAT

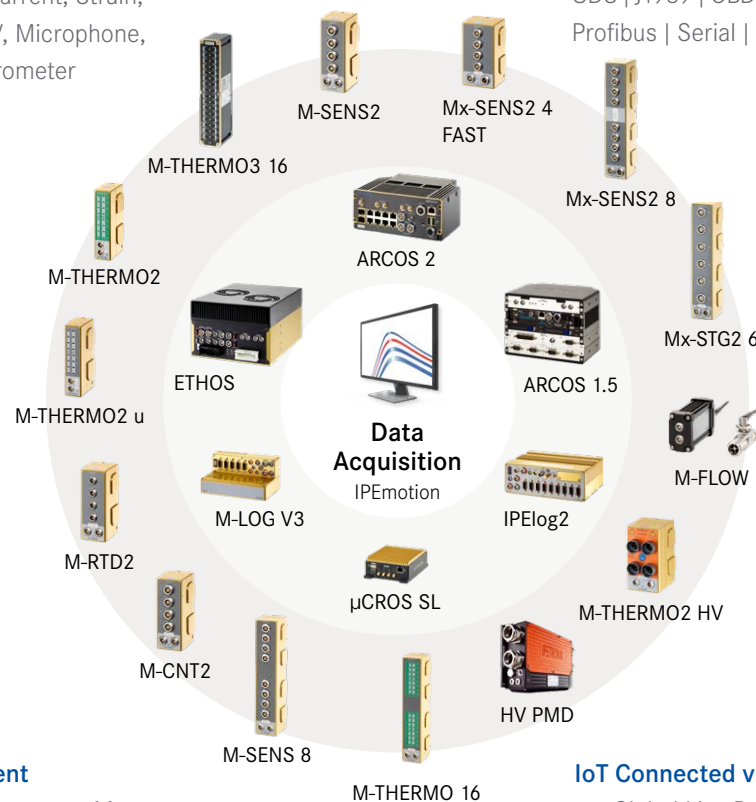

#### High Voltage Equipment


- ▶ Highly Isolated Temperature Measurement
- ▶ High Potential Voltage Measurement
- ▶ Current Measurement on HV

#### IoT Connected via App

- ▶ Global Live Data, Video, GPS
- ▶ Android™, iOS®, Browser Support
- ▶ Remote Trigger Functions

## Products IPEmotion

### Software and Cloud

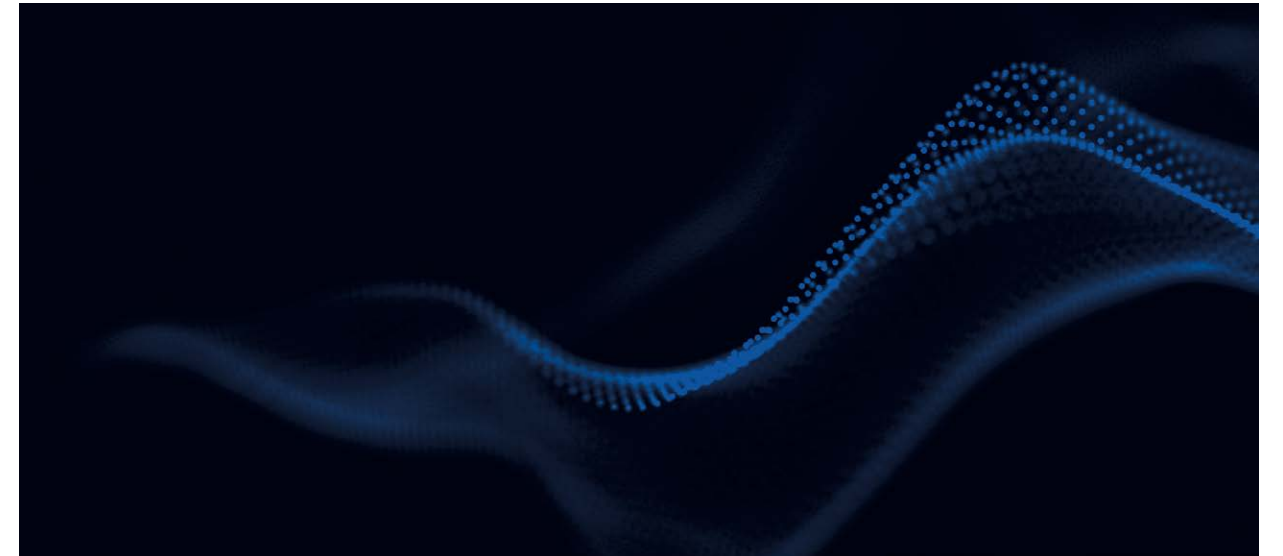


#### IPEmotion DAQ Software

- ▶ Data Recording
- ▶ Post Processing & Analysis
- ▶ 3rd Party PlugIns
- ▶ Acoustics & Thermodynamics
- ▶ Test Sequence Control
- ▶ Python Scripting
- ▶ Automatic Reporting
- ▶ Real time Notifications

#### IPEcloud

- ▶ Data Storage
- ▶ MATLAB
- ▶ Automated Reporting
- ▶ Event Tagging
- ▶ Unit & Signal Name Standardization
- ▶ Data Format Conversion/Export
- ▶ Multiple Data Sources

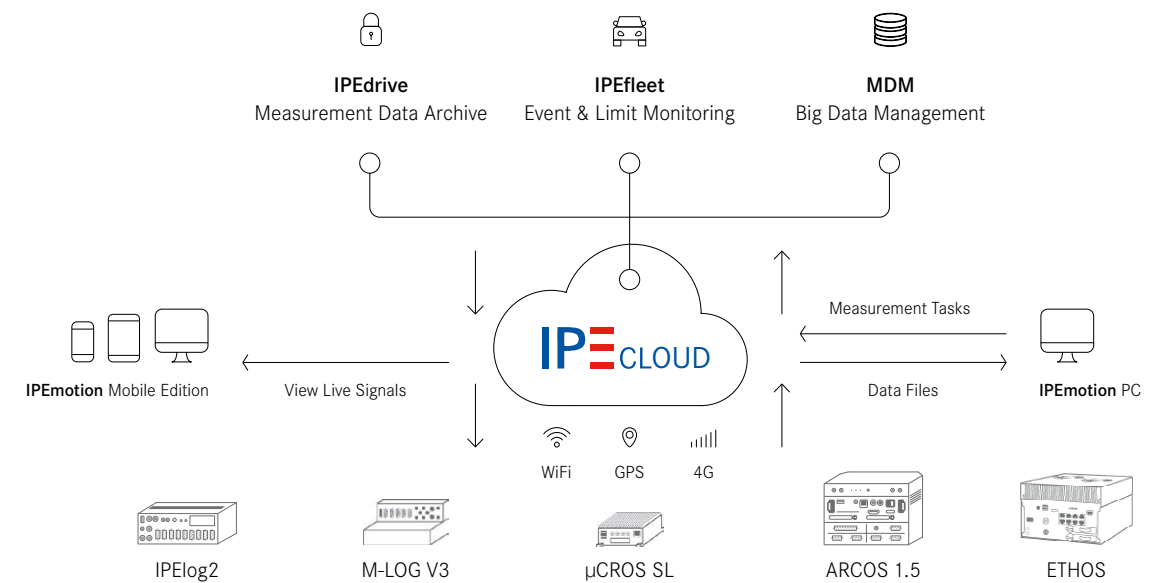



# IPEmeasure and IPEmotion

## A Comprehensive Hardware and Software Solution



\*This image may differ from original product.



### IPEmotion DAQ Software

- ▶ Live Measurements
- ▶ Calculated Channels
- ▶ Post Processing & Analysis
- ▶ Configuration of IPETRONIK Hardware
- ▶ 3rd Party Support



### IPEcloud

- ▶ Fleet Monitoring
- ▶ Automated Reporting
- ▶ Live Remote Data Access
- ▶ Remote Reconfiguration




### Vehicle Bus & ECU Access

- ▶ OBDII | SAE J1939 | WWH-OBD
- ▶ Seed & Key
- ▶ XCP | CCP | KWP
- ▶ UDS ISO 14229
- ▶ CAN | CAN FD | Automotive Ethernet | FlexRay



### Sensors and Accessories

- ▶ 3rd Party Support
- ▶ Cameras (IP and USB)
- ▶ Audio
- ▶ Low Speed and High Speed Signal Conditioners

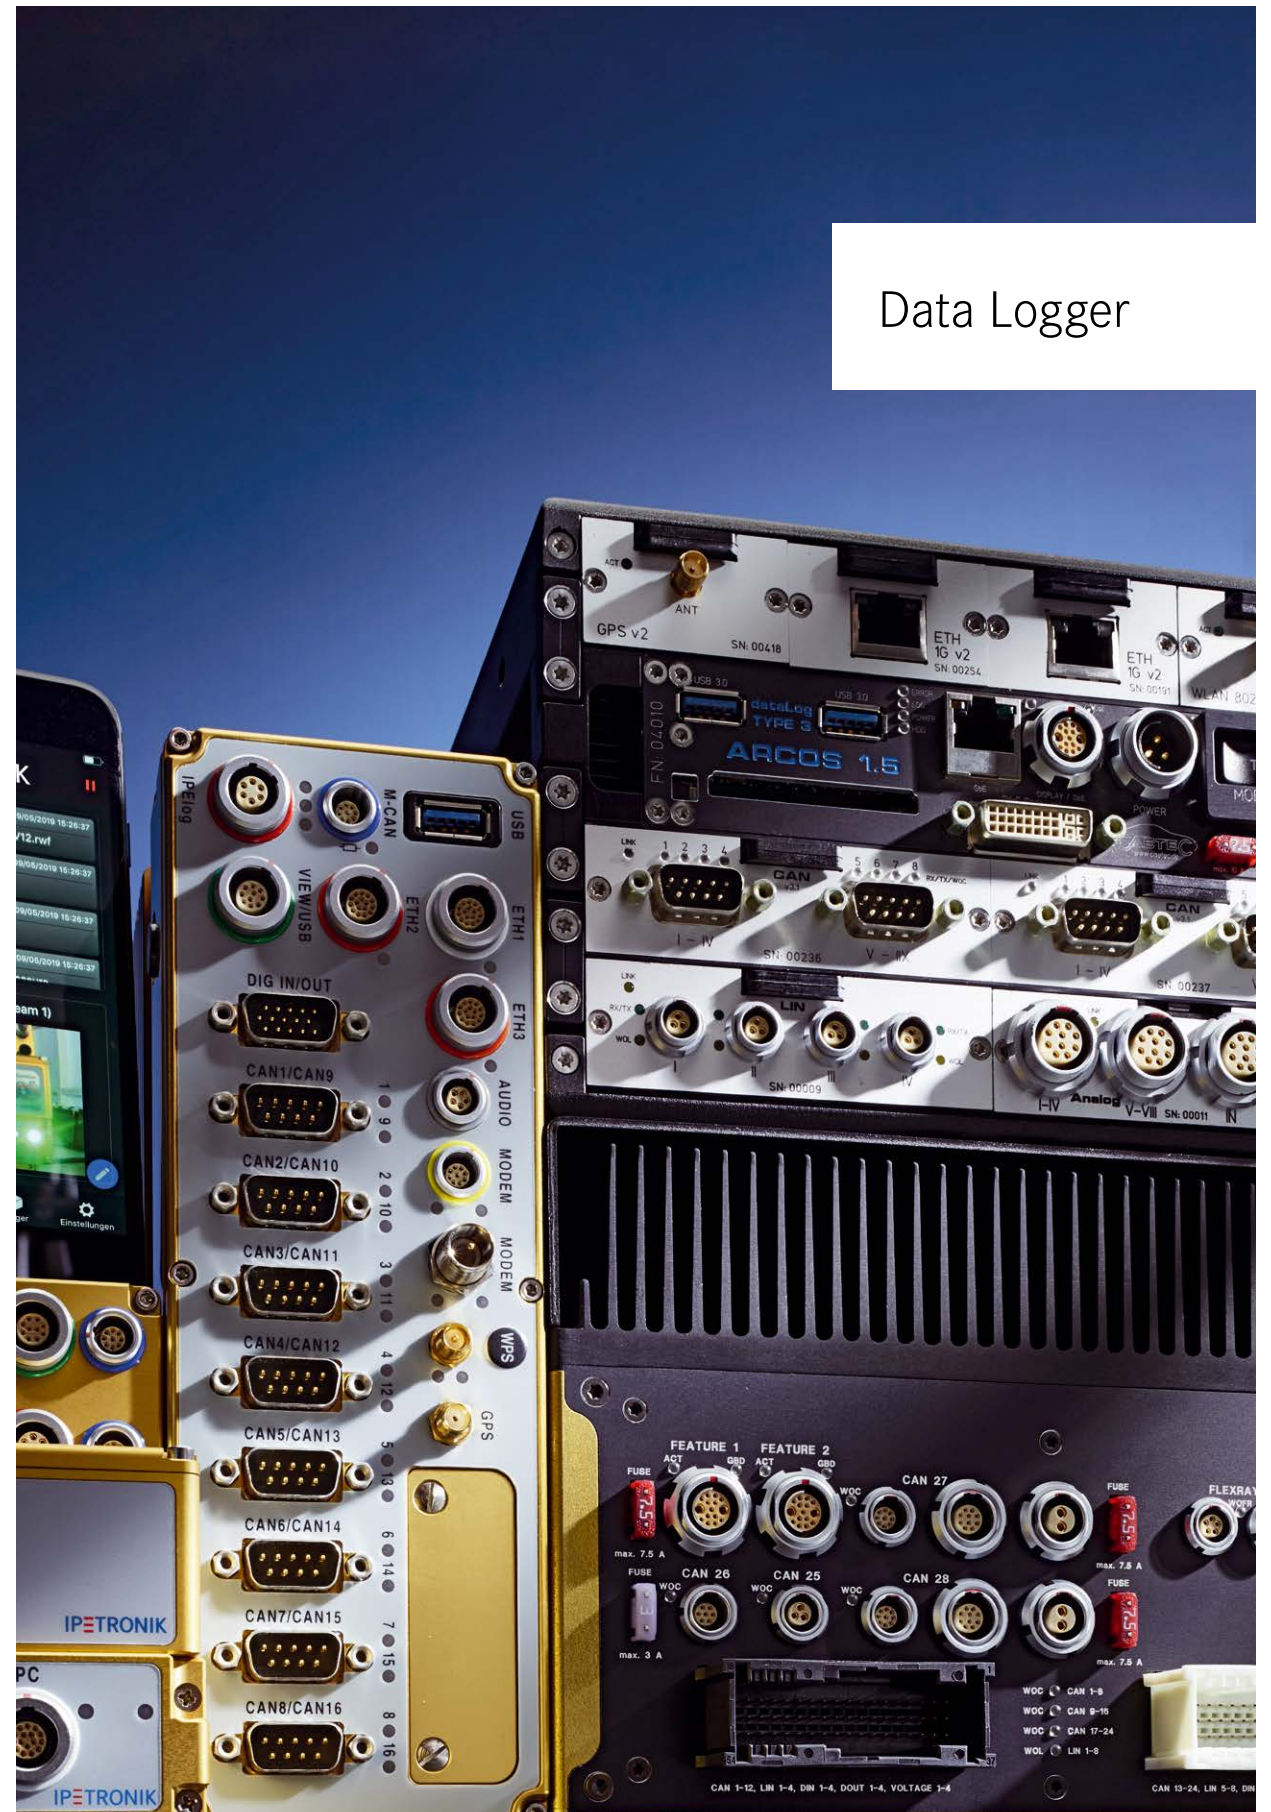

Data Logger



## ETHOS

### High Performance Data Logger for Automotive Ethernet Networks

- ▶ Developed for validation of large vehicle network architectures
- ▶ 28 CAN FD, 8 x 1 GbE, 8 LIN, 2 FlexRay, 8 DIO, 8 analog inputs
- ▶ Up to 480 GB internal storage
- ▶ 2 slots for removable storage drives (up to 2 TB)
- ▶ Data ingest to company network via ingest station
- ▶ Multiple video channels for USB and IP cameras
- ▶ Wake on CAN, LIN, FlexRay (WoC, WoL, WoFR)
- ▶ Configuration with IPEmotion PlugIn CAETEC-dataLog & Web-Interface



## IPElog2

### Scalable Data Logger for Fleet Management

- ▶ Inputs are combinable up to 16 CAN FD, 6 LIN, 2 ETH
- ▶ 4 switchable CAN high speed and low speed inputs
- ▶ Quickstart, No Message Lost (NML), Wake on CAN/LIN/FlexRay
- ▶ cFast data storage up to 120 GB
- ▶ Integrated 4G /LTE modem, WiFi and GPS receiver
- ▶ Driver display via IPEmotion ME
- ▶ Galvanic isolation of CAN FD, LIN, ETH, DIG I/O inputs
- ▶ Developed for applications in harsh environments
- ▶ Software integration via XCP on ETH / A2L format



## ARCOS 2

### State-of-the-art Datalogger for Fleet Management and Validation of Vehicle Networks

- ▶ Modular, compact, powerful for e.g. ADAS tests with Video recording
- ▶ i7-processor
- ▶ 9 GbE, 2 feature ports, 2 SFP+ (10 GB)
- ▶ Freely scalable CAN, LIN, FlexRay, ETH inputs
- ▶ Power over Ethernet (4x PoE)
- ▶ Video support for USB and IP cameras
- ▶ Modem, WiFi, GPS (on request)
- ▶ Configuration via IPEmotion plugIn CAETEC-dataLog & web interface



## M-LOG V3

### Modular Data Logger for Fleet Management

- ▶ CAN FD, LIN, ETH inputs in combination available
- ▶ cFast data storage up to 64 GB
- ▶ 4G modem and WiFi interface with COMgate V3
- ▶ Microphone input and audio output
- ▶ Driver display via IPEmotion ME
- ▶ Quickstart, Wake on CAN (WoC)
- ▶ Galvanic isolation of CAN FD, LIN, ETH, DIG I/O inputs
- ▶ Developed for applications in harsh environments
- ▶ Software integration via XCP on ETH / A2L format



## ARCOS 1.5

### Highly Modular Data Logger for Fleet Management

- ▶ Full scalability of CAN, LIN, FlexRay, ETH inputs
- ▶ 3G modem, WiFi and GPS can be modularly equipped
- ▶ HDMI and DVI interface
- ▶ Multiple video channels for USB and IP cameras
- ▶ Wake on CAN, LIN, FlexRay (WoC, WoL, WoFR)
- ▶ Quickstart, No Message Lost (NML), Wake on CAN (WoC)
- ▶ Developed for applications in harsh environments
- ▶ Configuration via IPEmotion plugIn CAETEC-dataLog & web interface






## μCROS SL




### Compact Data Logger for Fleet Management

- ▶ 4 CAN High Speed Interfaces
- ▶ Quickstart, No Message Lost (NML), Wake on CAN (WoC)
- ▶ Integrated 4G /LTE Modem, WiFi and GPS Receiver
- ▶ 1 Digital Output, 2 Digital Inputs
- ▶ 2 Analog Inputs 0 ... 40 VDC @ 10 bit/50 Hz Cut-Off Frequency
- ▶ Plastic and Aluminum Housing, Gold Anodized
- ▶ Configuration with IPEmotion RT.UI Software



## IPEmeasure Data Logger Overview

Device	 ETHOS	 ARCOS 2	 ARCOS 1.5
Operating System	Linux (64 bit)	Linux (64 bit)	Linux (64 bit)
Processor	Intel i7-6820EQ	Intel i7-9850HL	Intel i3 (i5 for Windows)
RAM Memory	16 GB	16 GB	4 ... 16 GB
Data Logger Software	dataLog/IPEmotion/ IPEmotion RT	dataLog and IPEmotion RT	dataLog/IPEmotion/ IPEmotion RT
Storage Medium	m2.SATA	m2.SATA	cFast + mSATA + 2 x SATA mit DriveBay
Storage Capacity	32/256/480 + 2 x 960 GB	Internal storage: 32 - 960 GB Removable storage drive NF1: optional 2 x 960 GB	8/ 16/ 32/ 64 GB + 4 ... 500
<b>Software Functions</b>			
Configuration Software	IPEmotion RT.UI	IPEmotion	IPEmotion RT.UI
No Message Lost (NML)	■	■	■
Wake on CAN (WoC)	■	■	■
Wake on LIN (WoL)	■	■ (datalog)	■
Wake on FlexRay (WoFR)		■ (datalog)	
Wake on Real Time (WoRTC)	■	■	■
On Board Scripting	■	■	■
On Board Math & Logic Operations	■	■	■
File Formats for Data Storage	BLF, AVI, WAV, MDF4.0, MDF4.1, ASC, ATFX	BLF, AVI, WAV, MDF4.0, MDF4.1, ASC, ATFX, PCAP	BLF, AVI, WAV, MDF4.0, MDF4.1, ASC, ATFX
<b>Interfaces</b>			
Ethernet Interface to PC	1 GbE	1 GbE	1 GbE / 2 x 1 GbE
USB 2.0 Ports	2		2 ... 4
USB 3.0 Ports	2 (USB 3.1)	2 (USB 3.1)	1 ... 2
Lemo, 9-Pin for M-CAN Modules	■	Via RM Module	Via PM Module
CAN HS/CAN FD	■	■	■/ via CAN FD Satellite Interface
CAN LS (Low Speed)			
LIN (1.3 & 2.0)	8	■	■
ETH (100 Mbit)		■	■
ETH (1 GbE, Feature Con.)	2	2	■
ETH (1 GbE, RJ45)	8	9	1
SFT+ (10 GbE)	1	2	
FlexRay	2	■	■
Digital I/O	8	■	8/8
Audio Input / Output	CAN	CAN	CAN
Driver Display System		openABK, DRIVEview	openABK / HDMI / DVI


Device	 IPElog2	 M-LOG V3	 µCROS SL
Operating System	Linux (64 bit)	Linux (64 bit)	Linux (64 bit)
Processor	Intel ATOM E3940	Intel ATOM T3805	Intel ATOM x5-E3930
RAM Memory	4 GB	2 GB	2 GB
Data Logger Software	IPEmotion RT	IPEmotion RT	IPEmotion RT
Storage Medium	cFast	cFast	m2.SATA
Storage Capacity	8/16/32/64/120 GB	8/16/32/64 GB	32 GB/256 GB
<b>Software Functions</b>			
Configuration Software	IPEmotion RT.UI	IPEmotion RT.UI	IPEmotion RT.UI
No Message Lost (NML)	■		■
Wake on CAN (WoC)	■	■	■
Wake on LIN (WoL)	■		
Wake on FlexRay (WoFR)			
Wake on Real Time (WoRTC)	■		
On Board Scripting	■	■	
On Board Math & Logic Operations	■	■	■
File Formats for Data Storage	ZIPRT, MDF4.1	ZIPRT, MDF4.1	BLF, AVI, WAV, MDF4.0, MDF4.1, ASC, ATFX
<b>Interfaces</b>			
Ethernet Interface to PC	1 GbE	100 Mbit	100 Mbit
USB 2.0 Ports	1	2	2
USB 3.0 Ports	1		
Lemo, 9-Pin for M-CAN Modules	1	2	
CAN HS/CAN FD	■	■	CAN HS
CAN LS (Low Speed)	■	■	
LIN (1.3 & 2.0)	1 ... 6	■	
ETH (100 Mbit)	1	2	
ETH (1 GbE)	2		
ETH (10 GbE)			
SFT+ (10 GbE)			
FlexRay	Via FlexRay Satellite Interface	Via FlexRay Satellite Interface	
Digital I/O	4/4	4/4	2/1
Audio Input / Output	1	1	
Driver Display System	IPEmotion ME	IPEmotion ME	



## Data Logger in an Automotive Ethernet Network

**Usecase:** ETHOS connected with Capture Module CM 100 High/CM 1000 High

- ▶ Cascading of Several Modules
- ▶ Startup Buffer

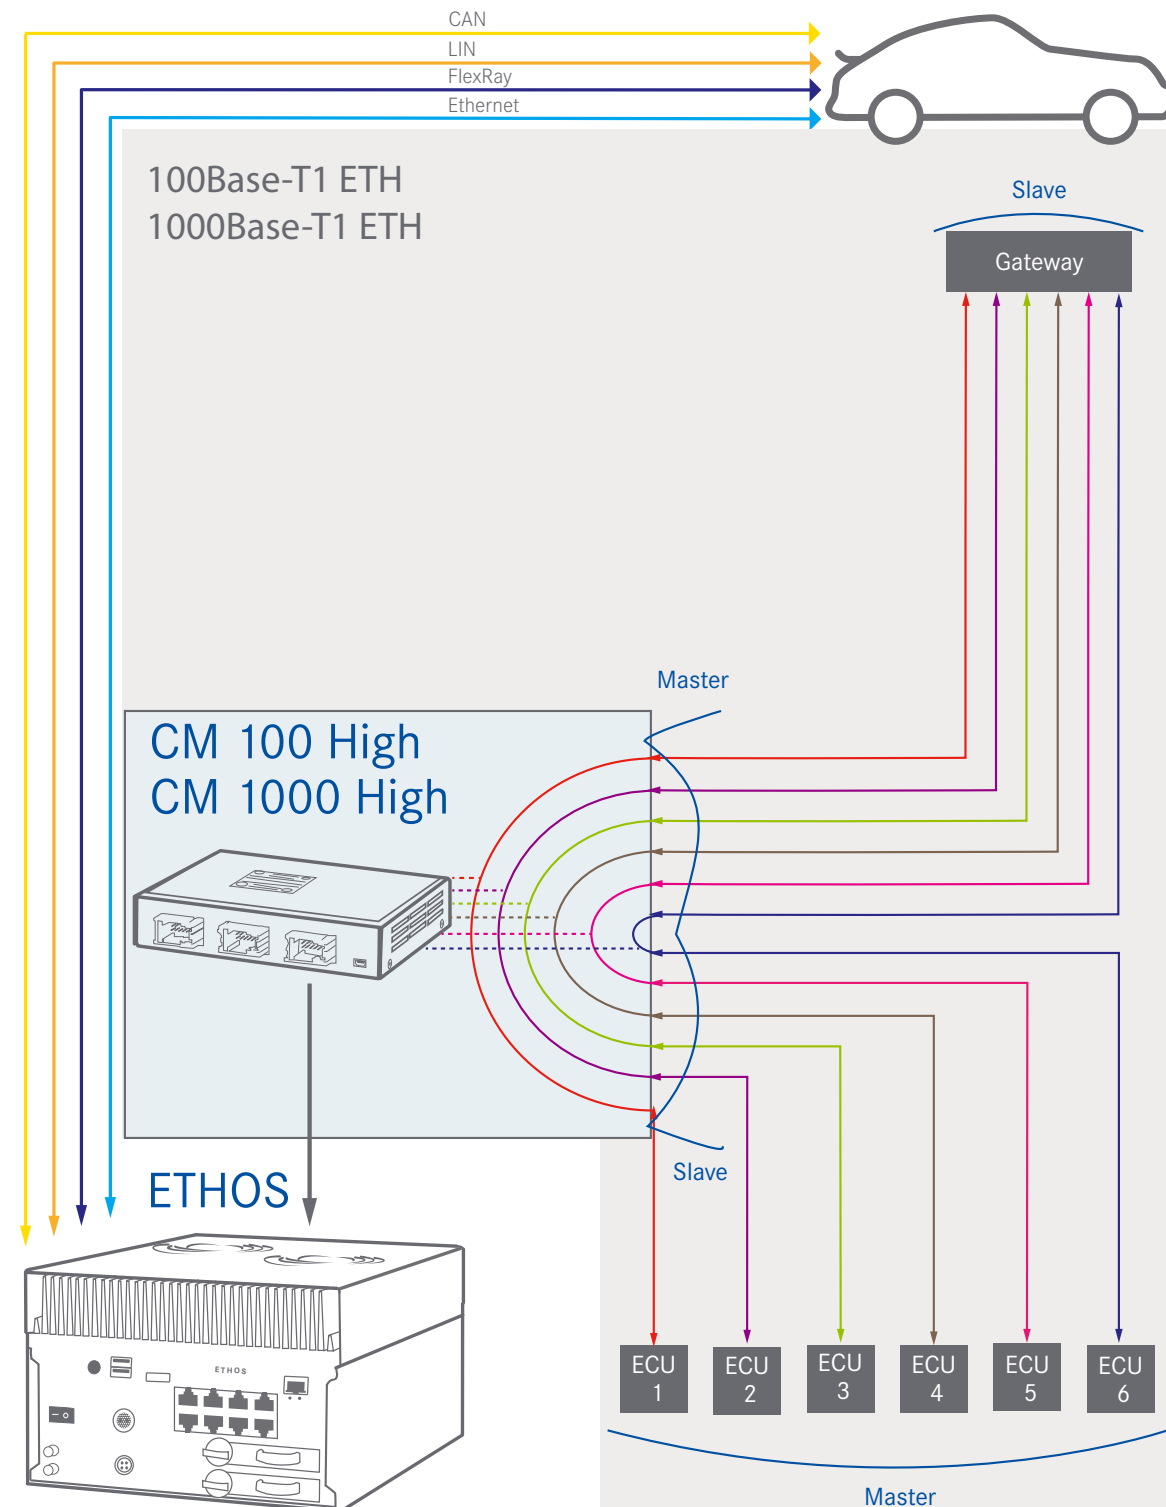

## Data Logger in an Automotive Ethernet Network

**Hardware used for this Usecase**

### ETHOS

High Performance Data Logger for Automotive Ethernet Networks

- ▶ Developed for Validation of Large Vehicle Network Architectures
- ▶ 28 CAN FD, 8 x 1 GbE, 8 LIN, 2 FlexRay, 8 DIO, 8 Analog Inputs
- ▶ Up to 480 GB Internal Storage
- ▶ 2 Slots for Removable Storage Drives (up to 2 TB)
- ▶ Data Ingest to Company Network via Ingest Station
- ▶ Multiple Video Channels for USB and IP Cameras
- ▶ Wake on CAN, LIN, FlexRay (WoC, WoL, WoFR)
- ▶ Configuration via PlugIn IPEmotion RT or dataLog (Depending on Operating System)



CM 100 High 

Ethernet Capture Module

- ▶ Analysis of Automotive Ethernet Networks
- ▶ 6 Link Lines 100BASE-T1 (12 ports)
- ▶ TECMP Protocol
- ▶ Configuration via Web Interface
- ▶ Network Time Synchronization (802.1AS)
- ▶ Cascading of Several Modules
- ▶ Developed for Automotive Applications
- ▶ Data Logger Support for ETHOS, ARCOS 1.5, IPElog2




CM 1000 High 

Ethernet Capture Module

- ▶ Analysis of Automotive Ethernet Networks
- ▶ 6 Link Lines 1000BASE-T1 (12 ports)
- ▶ TECMP Protocol
- ▶ Configuration via Web Interface
- ▶ Network Time Synchronization (802.1AS)
- ▶ Cascading of Several Modules
- ▶ Developed for Automotive Applications
- ▶ Data Logger Support for ETHOS, ARCOS 1.5, IPElog2





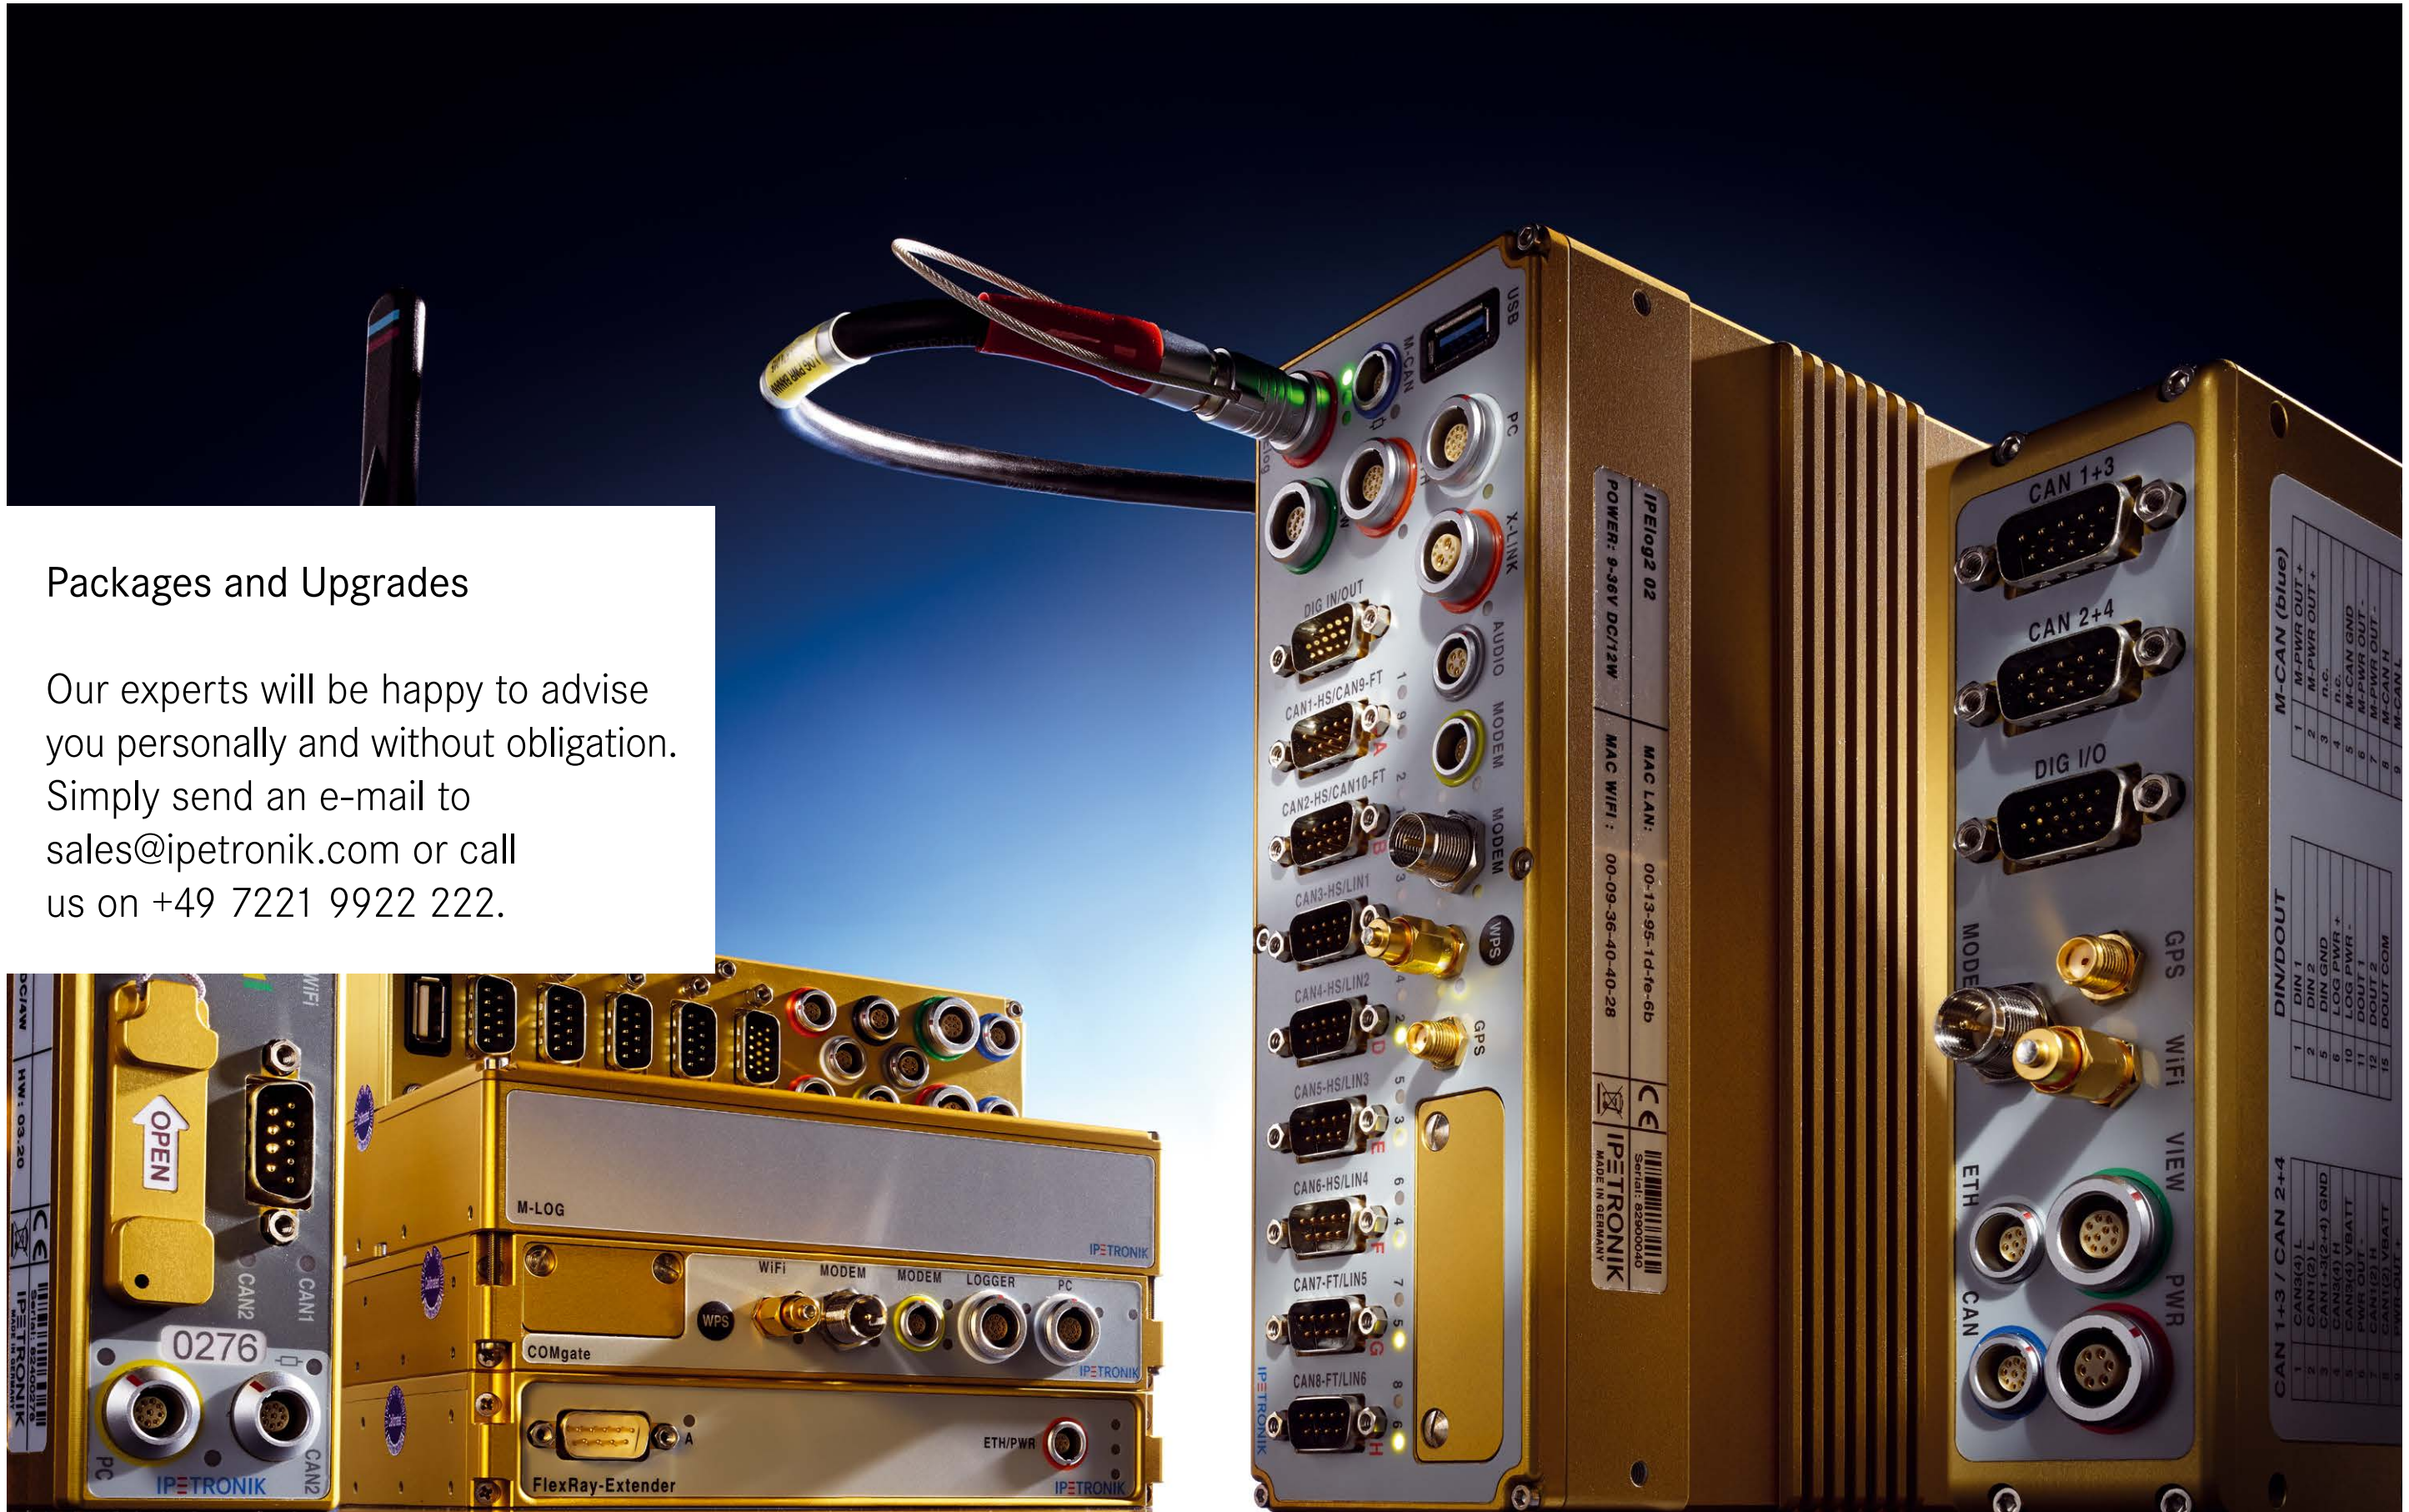


### Packages and Upgrades

Our experts will be happy to advise you personally and without obligation. Simply send an e-mail to [sales@ipetronik.com](mailto:sales@ipetronik.com) or call us on +49 7221 9922 222.





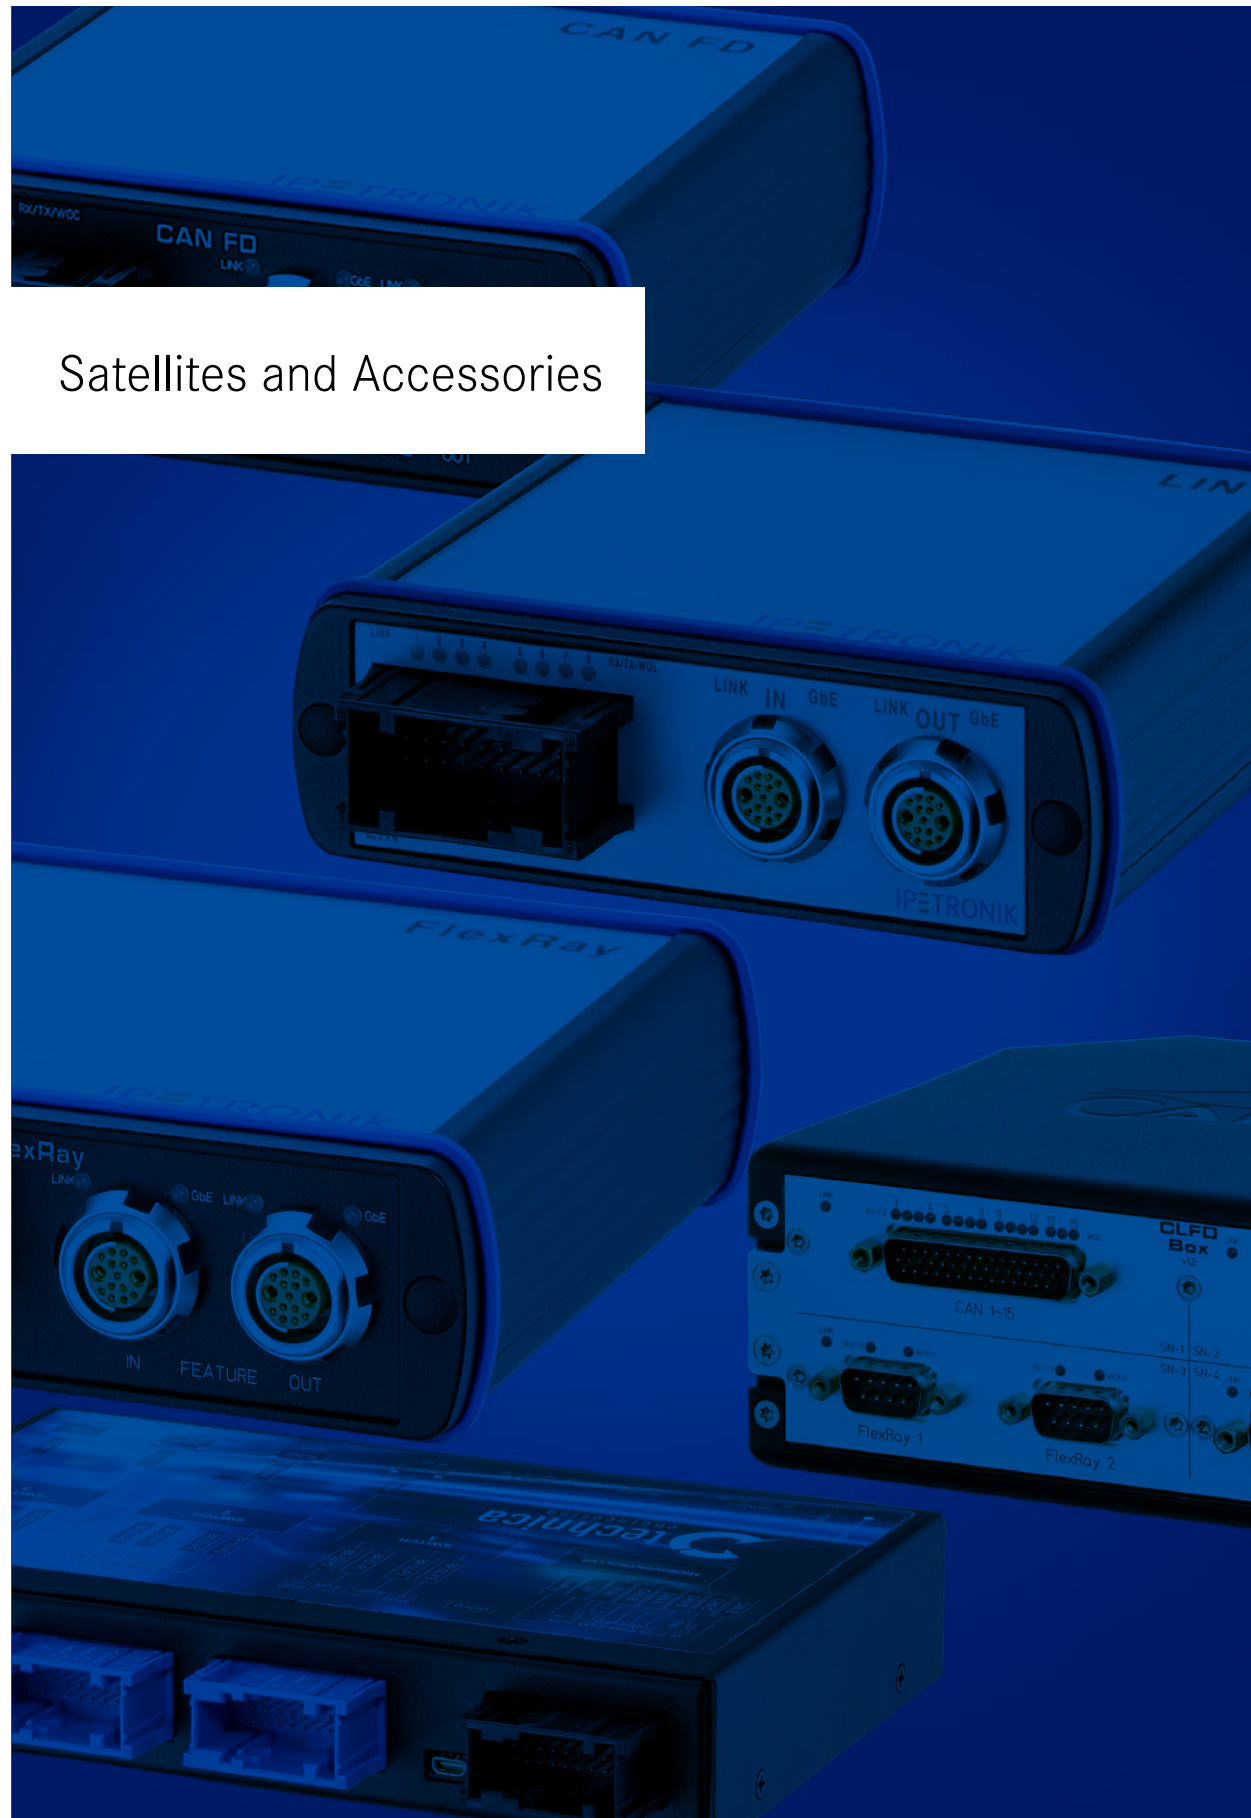

Satellites and Accessories

## LIN Satellite Interface

### Satellite with 8 LIN Inputs

- ▶ Extension Unit for ETHOS, ARCOS 1.5, IPElog2, M-LOG V3
- ▶ Feature Connector with GbE, Supply and Wake Function
- ▶ Daisy-Chaining of Multiple Satellites
- ▶ Wake on LAN (WoL) and No Message Lost (NML) Support for ARCOS 1.5 / ETHOS
- ▶ Configuration with IPEmotion Software
- ▶ 9 Status LEDs



## CAN FD Satellite Interface

### Satellite with 4 ISO CAN FD Inputs

- ▶ Extension Unit for ETHOS, ARCOS 1.5, IPElog2, M-LOG V3
- ▶ Feature Connector with GbE, Supply and Wake Function
- ▶ Daisy-Chaining of Multiple Satellites
- ▶ Wake on Can (WoC), No Message Lost (NML)
- ▶ Configuration with IPEmotion Software
- ▶ 9 Status LEDs



## FlexRay Satellite Interface

### Satellite with 2 FlexRay Inputs

- ▶ Extension Unit for ETHOS, ARCOS 1.5, IPElog2, M-LOG V3
- ▶ Feature Connector with GbE, Supply and Wake Function
- ▶ Daisy-Chaining of Multiple Satellites
- ▶ Wake of FlexRay (WoFR), No Message Lost (NML)
- ▶ Configuration with IPEmotion Software
- ▶ 7 Status LEDs



## MediaGateway

### 12 Broadcom 100BASE-T1 Ports

- ▶ Analysis of Automotive Ethernet Networks
- ▶ Traffic Routing via Ethernet
- ▶ Mirroring and Forwarding Functions
- ▶ Wake on CAN (WoC) or Wake Line
- ▶ 1 SFP+ Gigabit Port
- ▶ Supports Virtual LAN Networks (VLAN)
- ▶ Configuration via Web Interface
- ▶ Network Time Synchronization (802.1AS)
- ▶ Developed for Automotive Applications
- ▶ Data logger Support for ETHOS, ARCOS 1.5, IPElog2



## CM ETH COMBO

### Ethernet Capture Module

- ▶ Analysis of Automotive Ethernet Networks
- ▶ 2 Link Lines 100BASE-T1 (4 Ports)
- ▶ 1 Link Lines 1000BASE-T1 (2 Ports)
- ▶ Configuration via Web Interface
- ▶ Network Time Synchronization (802.1AS)
- ▶ Daisy-Chaining of Multiple Satellites
- ▶ Developed for Automotive Applications
- ▶ Data logger Support for ETHOS, ARCOS 1.5, IPElog2



## CM 100 High/CM 1000 High

### Ethernet Capture Modules

- ▶ Analysis of Automotive Ethernet Networks
- ▶ 6 Link Lines 100BASE-T1/1000BASE-T1 (12 Ports)
- ▶ TECMP Protocol
- ▶ Configuration via Web Interface
- ▶ Network Time Synchronization (802.1AS)
- ▶ Cascading of Several Modules
- ▶ Developed for Automotive Applications
- ▶ Data logger Support for ETHOS, ARCOS 1.5, IPElog2



ill.: CM 100 High

## DRIVEview

### Wired Touch Display for IPEmotion ME

- ▶ Custom-Developed 7" Touch Display for Automotive Applications
- ▶ Versatile Live Display of Measurement Data due to Full IPEmotion ME Support
- ▶ Supported IPEmotion RT Loggers: ETHOS, IPElog2, M-LOG V3
- ▶ Trouble-Free Measurement Data Display with Cable Connection
- ▶ Special Automotive Holder Keeps Everything in View
- ▶ Convenient Configuration via Display or PC
- ▶ Wired Ethernet Connection
- ▶ Working Temperature Range: -20 ... 70 °C (-4 ... 158 °F)
- ▶ Storage Temperature Range: -20 ... 70 °C (-4 ... 158 °F)
- ▶ IP Code: IP 50 (ISO 20653 - 2013)
- ▶ Dimensions: W178 mm x H120 mm x D29 mm (7.00 in x 4.72 in x 1.14 in)
- ▶ Supported Logger Software: IPEmotion RT





## Data Transfer Station/DriveBay

### Data Acquisition with Removable Storage



The Data Transfer Station is used to transfer data acquired by loggers to remote servers, using the IPETRONIK NF1 removable storage drivebay. It can accommodate up to 12 trays storing measurement data. The measurement files contain a parameter file specifying the storage target. The Transfer Station is configured to interface with network attached storage through two 10GbE connections by default. Other network interfaces can be chosen to suit the customers' needs. The NF1 software detects SSDs automatically after insertion and initiates the transfer according to the configuration on the drive. For user feedback, progress is shown through an user interface on a connected screen and status information for each drive is also provided by two LEDs on the drive.

#### Performance


- ▶ CPU: AMD EPYC 7251 (EPYC 1st Gen)
- ▶ RAM: 16GB (1x 16GB)
- ▶ SSD: 1x 480 GB M.2 Industrial NVMe
- ▶ Power Supply: 500W
- ▶ 1x Gbit Ethernet (RJ45)
- ▶ 2x 10 Gbit Ethernet (SFP+)
- ▶ 3x USB 3.1 GEN. 1 (Type A, 2x Back, 1x Front)
- ▶ 2x USB 2.0 (Type A, 2x Back)


Technical Data	
Operating Temperature Range	0 °C ... +60 °C
Input Voltage (Operational)	100 ... 240V AC
Power Consumption Standby	Typ. 14 VA
Power Consumption Idle	Typ. 115 VA
Power Consumption Load (*)	Typ. 173 VA
Insert Rack	19"
Dimensions	W433 mm x H89 mm x D588 mm
Weight	Typ. 12.8 kg







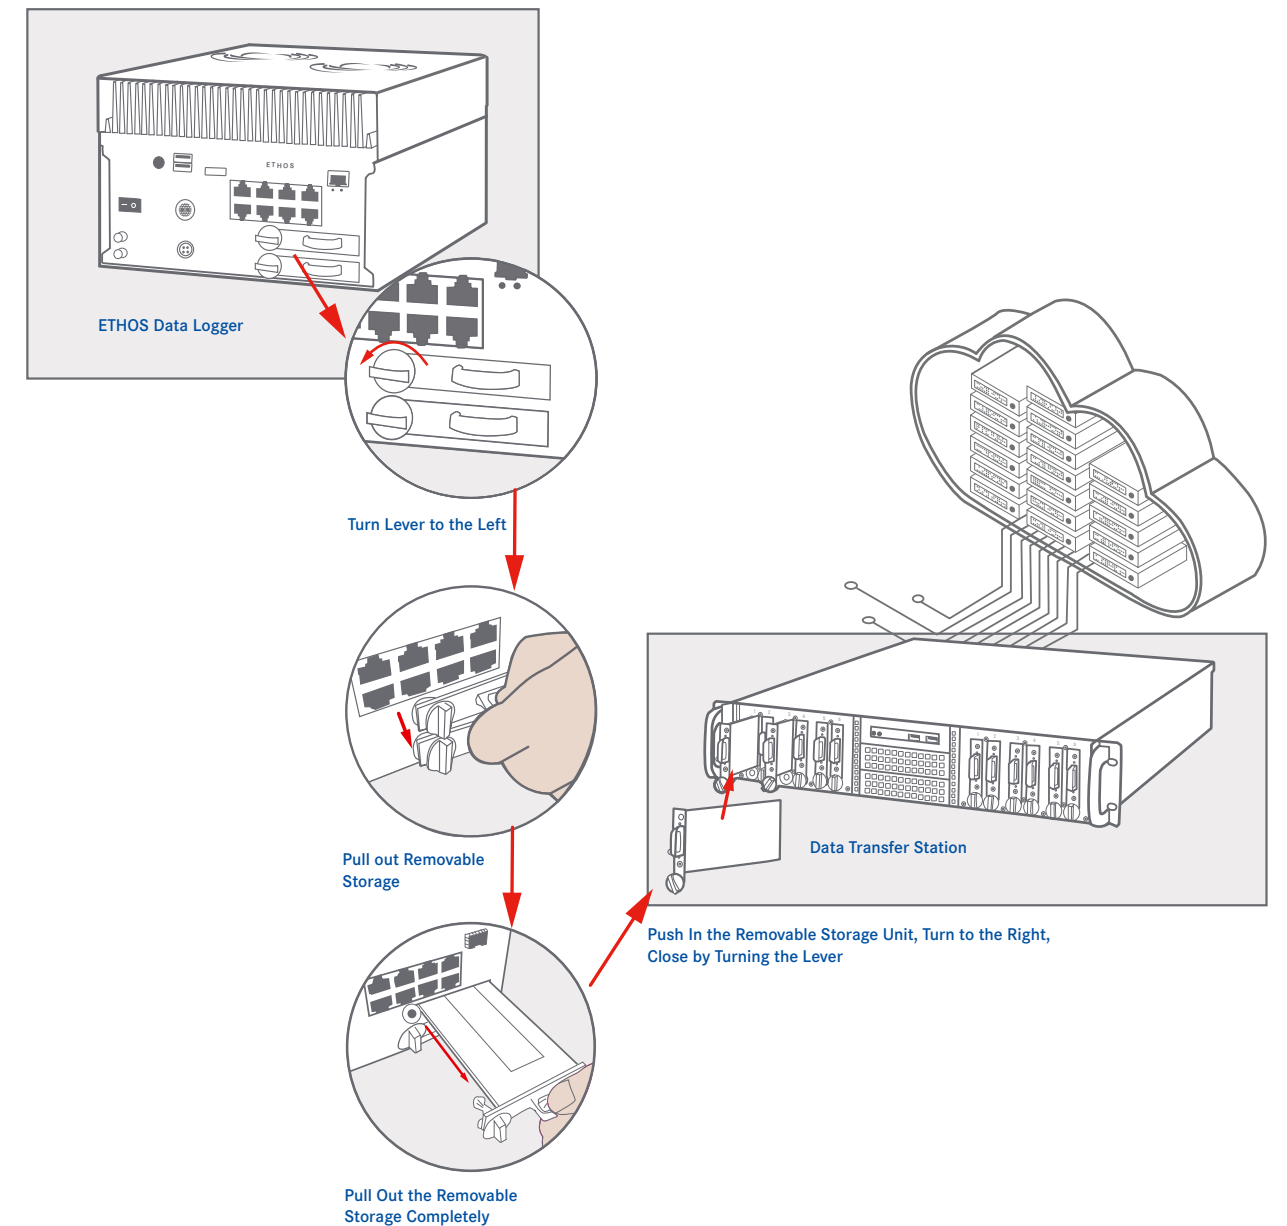

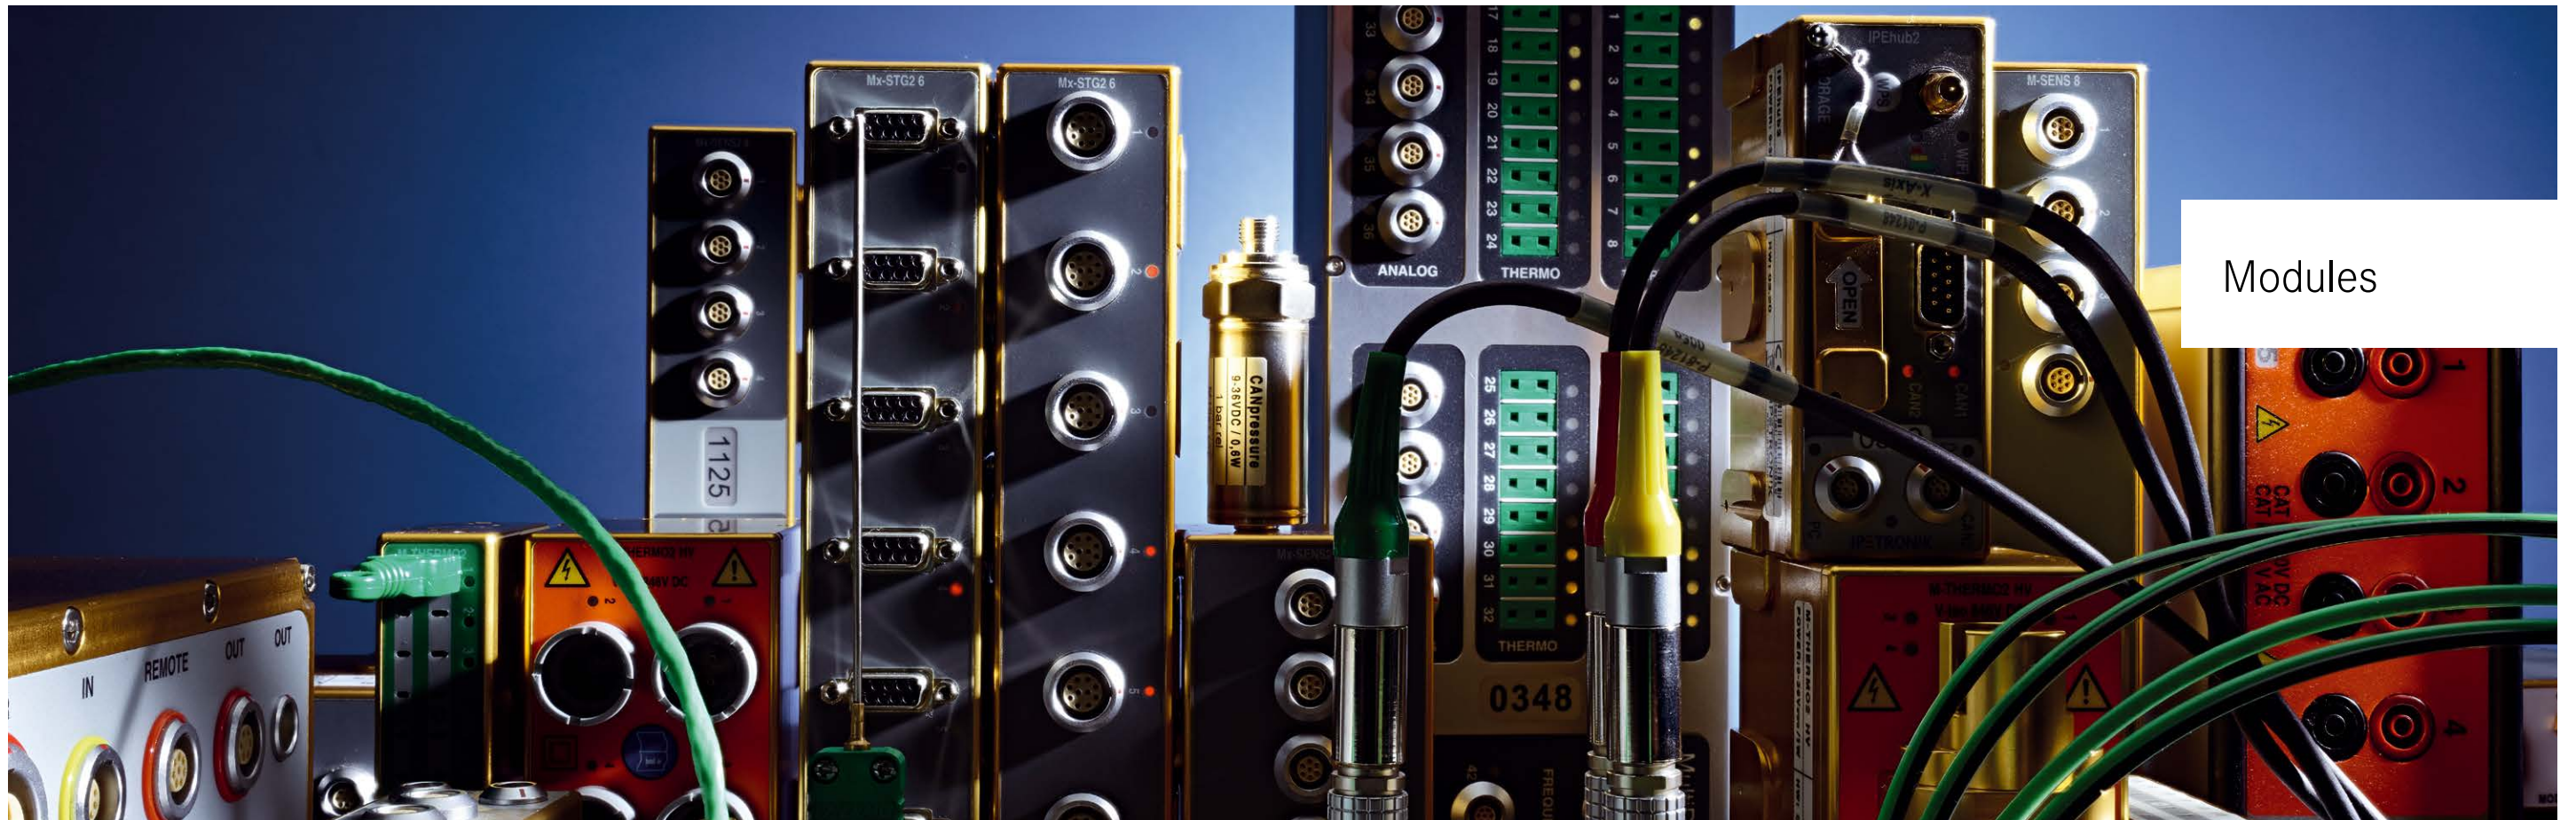

(\*) The additional power consumption generated by the DriveBay depends on the SSDs used!

## Data Transfer Station/DriveBay






### Data Acquisition with Removable Storage





Device	 M-THERMO2	 M-THERMO2 u	 M-THERMO 16	 M-THERMO3 16
Input Channels	8	8	16	16
Weight	315 g	295 g	630 g	450 g
A/D Converter	24 bit	24 bit	16 bit	24 bit
Channel Sample Rate Hz	100 Hz	100 Hz	20 Hz	200 Hz
Interface	CAN	CAN	CAN	CAN
 TEDS				
Thermocouple Type	K	K, E, J, N, R, S, T	K, T	K, B, C, E, J, N, R, S, T + 1 custom
 RTD				
 Volt  Current				
 IEPE				
 Frequency				

New

 M-RTD2	 M-SENS 2	 M-SENS 8	 M-CNT2	 Mx-SENS2 8	 Mx-STG2 6	 Mx-SENS2 4 FAST
4	4	8	4	8	6	4
410 g	420 g	695 g	420 g	690 g	800 g	500 g
16 bit	16 bit	16 bit		16 bit	24 bit	16 bit
100 Hz	2 kHz	2 kHz	5 kHz	10 kHz	100 kHz	400 kHz
CAN	CAN	CAN	CAN	ETH	ETH	ETH
	■	■		■	■	■
■						
	■	■		■	■	■
						■
			■			






# M-THERMO3 16

## 16-Channel Freely Selectable Thermocouple Inputs

With the new M-THERMO3 16 temperature measurement module, IPETRONIK is ushering in a new generation of devices. As the first module in the “M3 family”, the M-THERMO3 16 sets standards in modular measuring technology. Its 16 channels, which can be selected independently of the thermocouple type, offer a high degree of precision and flexibility with a high-resolution 24 bit analogue to digital converter (ADC). The M-THERMO3 16 is ultra-compact, robust and boasts a new wireless and magnetic connection concept – which saves time during installation and offers the best possible security for the data connection.

- ▶ Cold Junction Compensation for each Channel
- ▶ Wireless Module Connection
- ▶ High-resolution 24 bit Technology
- ▶ Ultra-compact and robust Design
- ▶ IP 67 and extended Temperature Range
- ▶ Galvanic Isolation (channel, CAN, supply)
- ▶ System Status Information (system, device, channel)
- ▶ Controllable multicolour LED for each Channel
- ▶ Magnetic Connecting Mechanism
- ▶ Measurement Data Output to CAN-FD\*

\* expected implementation of CAN-FD in 2023

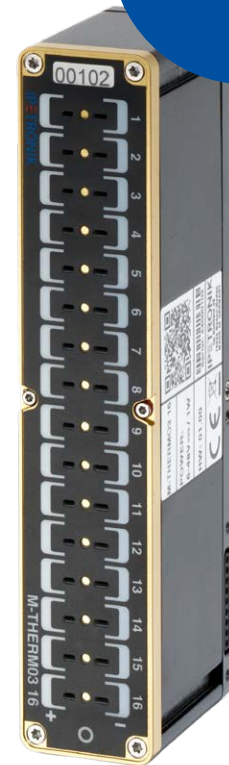

General Properties of Measurement Input	
AD Converter	24 bit (Sigma/Delta)
Channel Sampling Rates	500 Hz
Channel LED	1/ 2/ 5/ 10/ min – 1/ 2/ 5/ 10/ 20/ 50/ 100/ 200 Hz
Temperature Measurement Input	
Temperature Measurement Range	Type K (NiCr/NiAl) -270 ... 1372 °C (-454 to 2502 °F) Type B (Pt30Rh/Pt6Rh) 0 ... 1820 °C (32 to 3308 °F) Type C (W5Re/W26Re) 0 ... 2320 °C (32 to 4208 °F) Type E (NiCr/CuNi) -270 ... 950 °C (-454 to 1742 °F) Type J (Fe/CuNi) -210 ... 1200 °C (-346 to 2192 °F) Type N (NiCrSi/NiSi) -270 ... 1300 °C (-454 to 2372 °F) Type R (Pt13Rh/Pt) -50 ... 1768 °C (-58 to 3214 °F) Type S (Pt10Rh/Pt) -50 ... 1768 °C (-58 to 3214 °F) Type T (Cu/CuNi) -270 ... 400 °C (-454 to 752 °F) Custom
Cold Junction Compensation	One cold junction per channel
Device	
Reliable Input Voltage (Channel)	Operating safety ±60 V (continuous), device safety ±60 V (continuous), ESD protection
Averaging	Adjustable depth (1-100)
Working Temperature Range	-40 ... 125 °C (-40 to 257 °F)
Power Supply	9 ... 60 V
IP Rating	IP 67 (ISO 20653 – 2013)
Dimensions	L164 mm x W33 mm x D58 mm (6.50 in x 1.30 in x 2.28 in)
Weight	450g (0.99 lb)
Galvanic Isolation	±100 V (continuous), ±500 V surge voltage




## Mx-SENS2 4 FAST

### 4 Fast Analog Measurement Inputs up to 400 kHz

- ▶ Measurement Modes: SENS, mA, IEPE, Individual for Each Input
- ▶ 4 Separate Dual Sensor Excitations (up to ±15 V, up to ±60 mA)
- ▶ Offset Adjust Functions
- ▶ TEDS Class-2 Supported
- ▶ Measurement Data Output via XCP on Ethernet or CAN
- ▶ Designed for Engine Compartment Applications
- ▶ Toolless Module-to-Module Connection
- ▶ Rugged and Compact Modules for Harsh Environments



### Electrical Ballasts for HV Current & Voltage Measurement

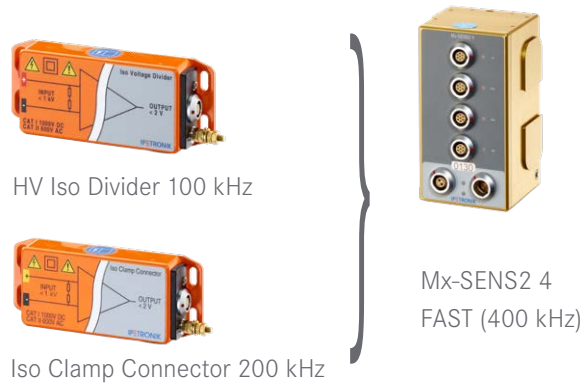

For a direct voltage and current measurement, isolated electrical ballasts have been developed. The latest generation offers an expanded signal bandwidth for the acquisition of HV analog signals and can be used for both DC and AC applications. The HV Iso Divider 100 kHz has a signal bandwidth of 100 kHz and is used in combination

with a current limiter. The Iso Clamp Connector 200 kHz in combination with a current clamp is ideal for isolated HV current measurements. With its 200 kHz bandwidth, it is also suited for AC applications. Having scaled the output signal to 2 V, it can be measured with the Mx-SENS2 4 FAST.



## Mx-STG2 6

### 6 Fast Strain Gauge Measurement Inputs up to 100 kHz

- ▶ 6 Dual Sensor Excitations (up to ±5 V, up to ±45 mA)
- ▶ Offset Adjust Functions, Shunt Check
- ▶ Internal Resistors for Bridge Completion Selectable
- ▶ TEDS Class-2 Supported
- ▶ Measurement Data Output via XCP on Ethernet or CAN
- ▶ Designed for Engine Compartment Applications
- ▶ Secure Module-to-module Connection
- ▶ Rugged and Compact Modules for Harsh Environments



## M-SENS2

### 4-Channel Analog Input Module with Sensor Excitation

- ▶ Measurement Modes: V, mA Selectable for Each Input
- ▶ 4 Sensor Excitations (Unipolar 15 V, up to ±60 mA)
- ▶ TEDS Class-2 Supported
- ▶ Measurement Data Output to CAN
- ▶ Galvanic isolation (Inputs, CAN, Supply, Enclosure)
- ▶ Designed for Engine Compartment Applications
- ▶ Toolless Module-to-Module Connection
- ▶ Rugged and Compact Modules for Harsh Environments



## M-THERMO2 u

### 8-Channel Universal Thermocouple Inputs Type E, J, K, N, R, S, T

- ▶ Cold Junction Compensation per Channel
- ▶ Status LED at Each Measurement Channel
- ▶ Measurement Data Output to CAN
- ▶ Galvanic isolation (Inputs, CAN, Supply, Enclosure)
- ▶ Designed for Engine Compartment Applications
- ▶ Toolless Module-to-Module Connection
- ▶ Rugged and Compact Modules for Harsh Environments





## M-FLOW

### Intelligent Flow Linearization

- ▶ Plug & Measure Linearizers
- ▶ SMART Pickoff to Store Calibration Data
- ▶ Up to 64 Calibration Points for Flow Meters (K-Factor pul/l vs. Frequency/Viscosity Hz/mm<sup>2</sup>/s)
- ▶ Up to 20 Calibration Points for Liquids (Temperature vs. Viscosity or Temperature vs. Density)
- ▶ Live Temperature Compensation
- ▶ Up to 5 Calibration Curves per Turbine
- ▶ CAN Measurement Data Output
- ▶ Galvanic Isolation (Channel, CAN, Supply, Enclosure)
- ▶ Developed for Engine Compartment Applications
- ▶ Secure Connection
- ▶ Compact and Rugged Device for Extreme Conditions



First Flowmeter Unit with M-System Integration

Device	
Flow Sample Rate	1000 Hz
Temperature Sample Rate	1000 Hz
Voltage Supply	6 ... 36 VDC
Power Consumption, typical	< 0.5 W
Working Temperature Range	-40 ... 125 °C (-40 ... 257 °F)
Storage Temperature Range	-55 ... 150 °C (-67 ... 302 °F)
IP Code	IP 68
Relative Humidity	0 ... 85 %
Dimensions	W122 mm x H34 mm x D55 mm (4,8 in x 1,34 in x 2,17 in)
Weight	145 g (lb)
Configuration Interface	CAN High Speed
Data Transfer Rate	Software Selectable up to 1 Mbit/s (ISO 11898-2)
Test Standards	IEC 61010-2-201
Input Sockets	ODU B G81B0C-P05QJ00/2x
Galvanic Isolation	
Input ↔ Module Power Supply	
Input ↔ CAN	±100 V (indefinitely), ± 500 V (pulse voltage)
Input ↔ Enclosure	
Input ↔ Input	

## M-FLOW

### Turbine Flowmeters

... are the ideal solution for measuring applications in liquids, when high accuracy, very fast response times, compact design, high reliability even in continuous operation and flow changes at fluctuating operating temperatures are required. A variety of selectable connections enables a needs-based use of the measuring devices.


#### Applications

The turbine wheel flow meters of the DM series have a wide range of applications. This includes, among other things, monitoring the flow rates of fuels and coolants and lubricants in engine and jet engine construction, measuring dosing quantities in the food and pharmaceutical sectors, monitoring and measuring ultrapure water in research and development, measuring quantities for consumption billing and much more.

#### Benefits

- ▶ Novel Helical Rotor Blade Design for Improved Linearity and Lower Pressure Loss
- ▶ Interference-free Signal Transmission through Digital Output Signal
- ▶ Precision Ball Bearings for Better Repeatability and Optimal Results at Low Flow Rates
- ▶ Very Large Measuring Range
- ▶ Temperature Sensor Integrated in the Measuring Sensor (Pickoff)

## SYSTEM SETUP M-FLOW

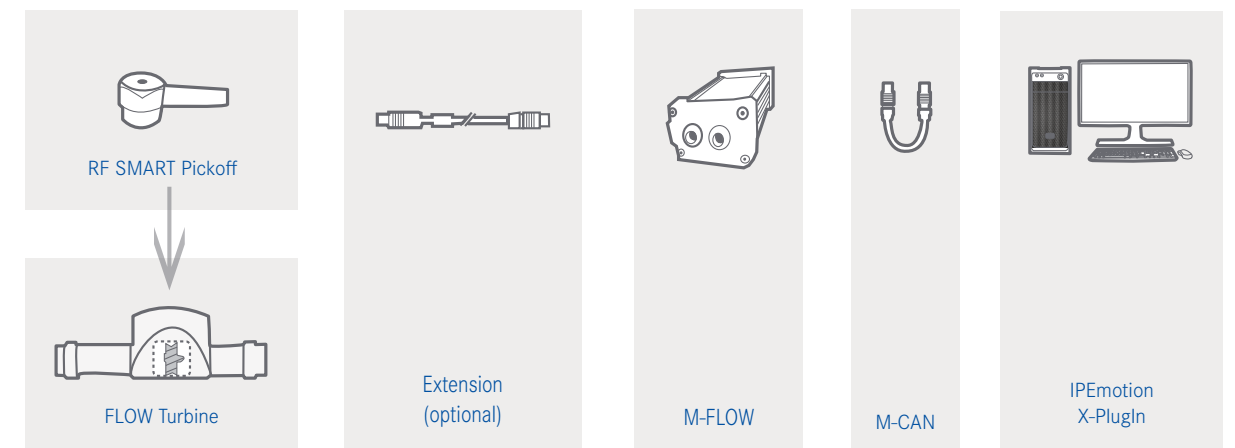








## X-FEED

### Power Feeder for the Intermediate Feed of X-Module Measurement Chains

- ▶ For the Intermediate Feed of PC and Logger X-LINK Module Chains
- ▶ Feed Current of up to 10 A
- ▶ IP Code 54
- ▶ Aluminium, Gold Anodized
- ▶ Operating Temperature Range: -40 ... 85 °C
- ▶ Dimensions: W 97 mm x H 30 mm x D 30 mm
- ▶ Weight: 125 g



### Possible System Structures

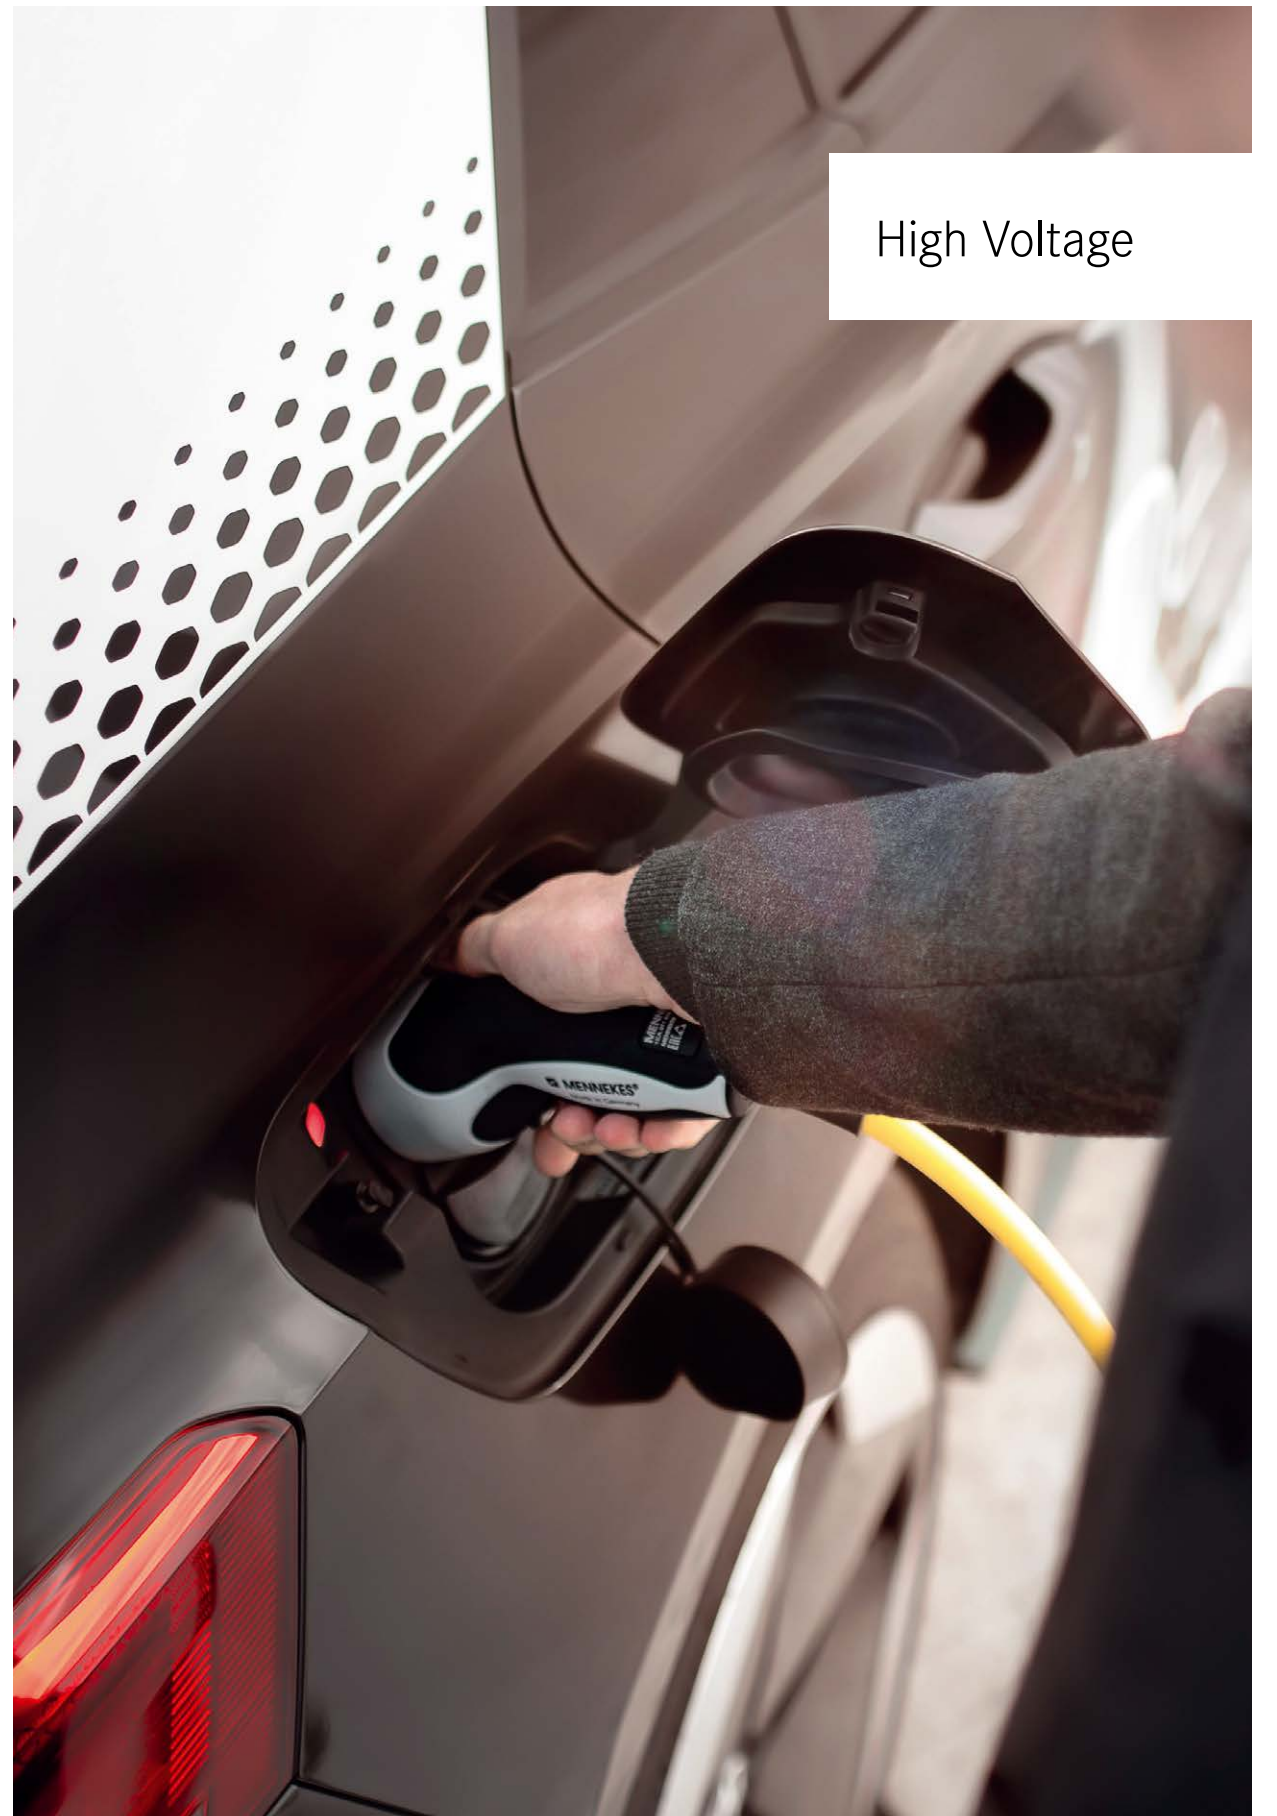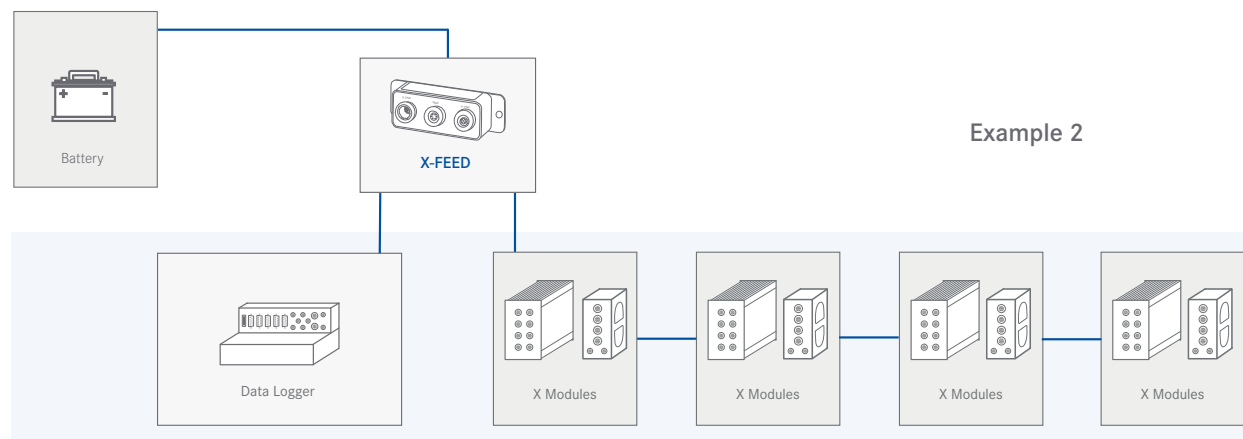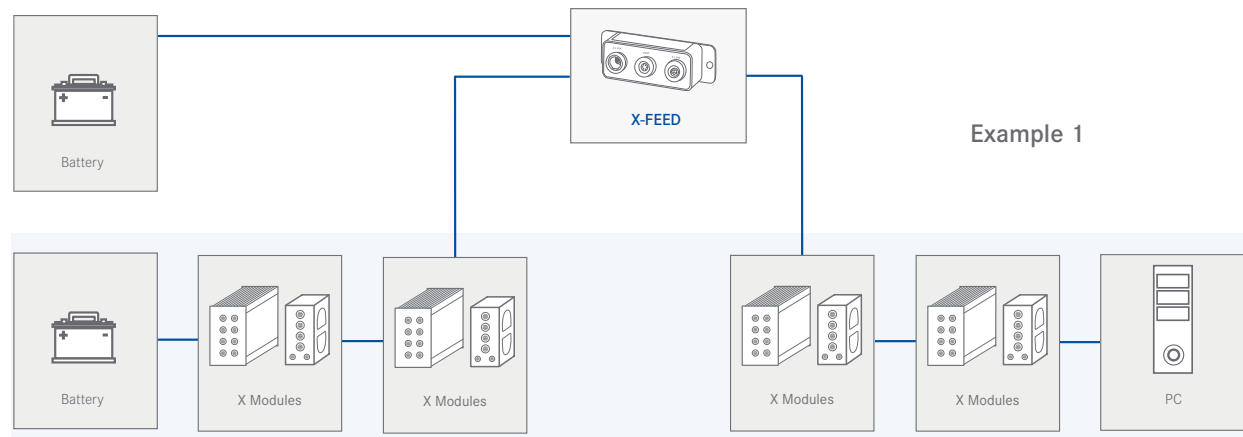



## HV PMD

### The Power Measurement Device for taking Measurements in HV Environments

The new integrated solution for measuring currents and voltages in high-voltage environments is ideally suited to analysing HV consumers in vehicles. Thanks to its smart high-voltage sensor, this measuring system is a safe solution in the area of e-mobility and has been tested according to EN 61010-1. The high-precision DC-CT current transducer enables maximum measuring accuracy, even in the extended temperature range of -40 °C to 70 °C.

Data is output via Ethernet to the IPETRONIK data loggers or the IPEmotion measuring software at a sampling rate of 1 MS/s. Its protection class of IP 67 and the extended temperature range mean that the HV PMD is particularly suitable for field test applications in vehicles and off-highway machinery, as well as for applications in agricultural and construction machinery.

- ▶ High-voltage measurement of charging processes in battery systems
- ▶ Determination of power consumption of auxiliary units
- ▶ Order and harmonic analysis, including for charging processes
- ▶ Analysis of frequency spectra between battery and inverter
- ▶ Power quality analysis in recuperation mode



*\*This image may differ from original product.*



Voltage Measurement Input	
Input Voltage	±1000 V
Cut-off frequency	5 MHz
Input Accuracy	DC ±0.03 % of measured value, ±0.02 % of measuring range, ±0.04 V
	Up to 1 kHz ±0.03 % of measured value ±0.02 % measuring range
	Up to 10 kHz ±0.1 % of measuring value, ±0.05% of measuring range
	Up to 100 kHz ±4 % of measured value, ±0.1 % of measuring range
Noise	Up to 1000 kHz, ±5 % of measured value, ±0.5 % of measuring range
	At 15 MS/s -87 dB
	At 1MS/s -94 dB
CMR, Typ. (Min.)	At 100 KS/s -107 dB
	At 10 KS/s -117 dB
	101 dB (88 dB) @50 Hz 75 dB (68 dB) @400 Hz
Gain Drift	Typ. 40ppm/K (max. 65 ppm/K)
Offset Drift	Typ. 0.5 mV/K + 1 ppm/K

Excerpt from the provisional data sheet

Current Measurement Input	
Current Measurement Range	±1000 A
Maximum withstand Peak Current	Min. -1700 A, max. 2000 A
Primary/secondary Ratio	1 : 1680
Input Accuracy (I <sub>p</sub> @10 arms)	DC ±0.1% of measurement value, ±50 ppm of range ±0.05 A
	Up to 10 kHz 25 mdB ±0.3 %
	Up to 20 kHz 70 mdB ±0.8 % Up to 200 kHz 350 mdB ±4 %
Gain Drift (current)	Typ. 20 ppm/K
Offset Drift	Typ. 200 uA/K
Linearity Error @1000 A Range	Typ. 50 ppm
Hysteresis	Typ. 50 uA/A
Flatness DC-50 kHz total Accuracy at 25 °C	Typ. 5 mdB
Flatness 50-1 kHz total Accuracy at 25 °C	Typ. 20 mdB
CMRR	137 dB (450 uA/V)
Device	
Internal Sampling Rate	15 MS/s
Power Supply	9 ... 54 VDC (PoE)
Power Consumption, typical	13 W (max. 23 W)
Working Temperature Range	-40 ... 70 °C (-40 ... 158 °F)
IP Rating	IP 67 (ISO 20653 - 2013)
Dimensions	W245 mm x H151 mm x D63 mm (9.65 in x 5.94 in x 2.48 in)
Weight	4.4 kg (max. 7 kg)/9.7 lb (max. 15.43 lb)
Configuration Interface	GbE (XCP, OPC UA)



## Product Overview – HV Systems

### HV Temperature Measurement Systems for E-Mobility



M-THERMO2 HV (Multi Plug): 4-Channel

#### Temperature Measurement in HV Applications

For temperature measurement tasks, e.g. at non-isolated measuring points of electric vehicles, the devices of our product line M-THERMO2 HV are a perfect fit. In addition to the high galvanic isolation of  $\pm 846$  VDC, our modules offer TÜV-certified safety acc. to EN 61010-1:2001 and are approved for applications acc. to CAT I and CAT II. The M-THERMO2 HV combines four thermocouples in one cable. This is ideal for measuring points which are very close to each other and reduces sensor costs. Moreover, smaller cable cross-sections equal smaller feedthroughs within the vehicle.



HVshunt 3

#### HVshunt Measurement Systems

Our HVshunt devices have been developed for high voltage current and voltage measurement applications in electric and hybrid vehicles. The devices measure voltages of up to  $\pm 850$  VDC via the integrated HV Iso Divider and currents of up to  $\pm 900$  A via current transformer with an overall accuracy of  $\pm 0.2\%$ . With pre-assembled customer-specific plugs, the HVshunt can be safely integrated into the on-board HV supply system without the need for tools, reducing setup and removal times.



HV Iso Divider 100 kHz



Iso Clamp Connector 200 kHz



Mx-SENS2 4 FAST (400 kHz)

#### Electrical Ballasts for HV Current & Voltage Measurement

For a direct voltage and current measurement, we provide isolated electrical ballasts so that you may continue to use your existing IPETRONIK measurement technology. The latest generation offers an expanded signal bandwidth for the acquisition of HV analog signals and can be used for both DC and AC applications. The HV Iso Divider 100 kHz has a signal bandwidth of 100 kHz and can for example be used in combination with our Mx-SENS2 4 FAST. The Iso Clamp Connector 200 kHz and a current clamp are ideal for safe HV current measurements. With its 200 kHz signal bandwidth, you may also use it as a ballast for AC applications, e.g. in combination with the Mx-SENS2 4 FAST.



## HVshunt 3

### High-Precision Shunt for HV and Current Measurement

- ▶ For Electric and Hybrid Vehicle Applications
- ▶ High Voltage Measurement of up to 850 VDC
- ▶ Current Measurement of up to 300 ADC via Shunt Resistor, Depending on the Plug Configuration
- ▶ Customer-specific Plugs for Connection to High Voltage Network
- ▶ Direct Connection to IPETRONIK Modules
- ▶ Voltage Supply 5.5 V to 40 V
- ▶ Customer-specific Solution



Device	
Current Consumption, typical	30 mA
Voltage Supply	5.5 ... 40 VDC
Working Temperature Range	-20 ... 100 °C
Storage Temperature Range	-20 ... 100 °C
Relative Humidity	Up to 95 %
IP Code	IP 65 (ISO 20653 - 2013)
Dimensions	W108 mm x H100 mm x D42 mm (4.25 in x 3.94 in x 1.65 in)
Weight	776 g (1.71 lb)
Input Sockets	Customer-specific
Housing Material	Diecast Aluminium Enclosure
High Voltage Input	
Input Voltage	850 VDC
Current Measurement Range via Shunt Resistor	100 A                      300 A
Tolerance Shunt Resistor	$\pm 0.4\%$
Voltage Measurement	Up to 1000 VDC
Measurement Accuracy Voltage	0.5%


#### Safety instructions

Do not use in AC voltages of three-phase current drives of electric and hybrid vehicles due to extremely high transient voltages and HF currents! All users working on HV applications must be trained and approved for this kind of work.

## HV Iso Divider 100 kHz

### DC High Voltage Divider up to 1 kV Input Range

- ▶ Bandwidth up to 100 kHz
- ▶ Reliable Voltage Measurement on High Voltage DC Systems
- ▶ Electrically Isolated High Voltage Divider
- ▶ Short-Circuit Current Limitation via HV Current Limiter
- ▶ For Hybrid and Electric Vehicle Applications
- ▶ Direct Connection to SENS Modules
- ▶ Approved Applications According to CAT I and CAT II
- ▶ Use Only in Combination with HV Current Limiter

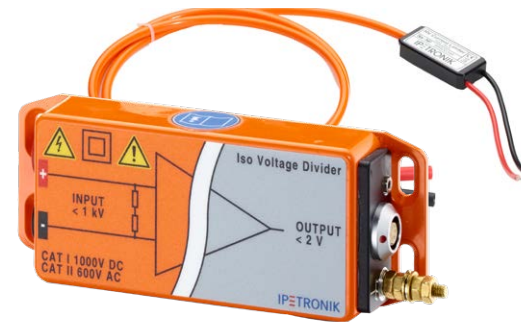

## Iso Clamp Connector 200 kHz

### DC High Voltage Current Clamp Front-End Device

- ▶ Bandwidth up to 200 kHz
- ▶ Current Measurement in High Voltage Networks up to 1 kV
- ▶ Reliable Current Measurement with Battery Powered Current Clamp Adapters
- ▶ For Hybrid and Electric Vehicle Applications
- ▶ Direct Connection to all IPETRONIK SENS Modules
- ▶ Approved Applications According to CAT I and CAT II



## M-THERMO2 HV (multi plug)

### 4 High Voltage Thermocouple Measurement Inputs Type K (NiCr/NiAl)

- ▶ Multi Channel High Voltage Safety Connector
- ▶ Cold Junction Compensation per Channel
- ▶ Status LED at Each Measurement Channel
- ▶ Measurement Data Output to CAN
- ▶ Galvanic Isolation, Bipolar up to ±846 VDC
- ▶ Approved Applications According to CAT I and CAT II
- ▶ Designed for Engine Compartment Applications
- ▶ Secure Module-to-Module Connection
- ▶ Rugged and Compact Modules for Harsh Environments



## Acoustics in E-Mobility

### Acoustic Chamber with HV Charging Station



With our acoustic chamber, charging station, and acoustic camera, we can identify noise sources in or on the vehicle, air-conditioning system, and charging station. Our acoustics team will optimize the noise emission if necessary.

#### Technical Features:


##### Acoustic Chamber

- ▶ Free Hemifield for Vehicle Testing
- ▶ Dimensions: 6.5 m x 4.7 m x 4.1 m (L x W x H)
- ▶ PAK System (MüllerBBM) with 120 Channels to Measure Acoustics and Vibration, Pressure Pulsation and CAN Bus
- ▶ Integrated Vehicle Lift
- ▶ Loadbox Measurement (IPEload)
- ▶ Acoustic Camera
- ▶ Workshop and Laboratory for Vehicle Modification Nearby
- ▶ Air Temperature: 20 °C
- ▶ Exhaust Extraction

##### Charging Station

- ▶ Up to 350 kW Charging Capacity
- ▶ Measurement of the Specific Parameters (Charging Current, Voltage, Temperature, etc.)
- ▶ CCS-2 with DC Charging Function
- ▶ AC: 480V, 63A | DC: 850V, 125A
- ▶ Manufacturer: PORSCHE Engineering




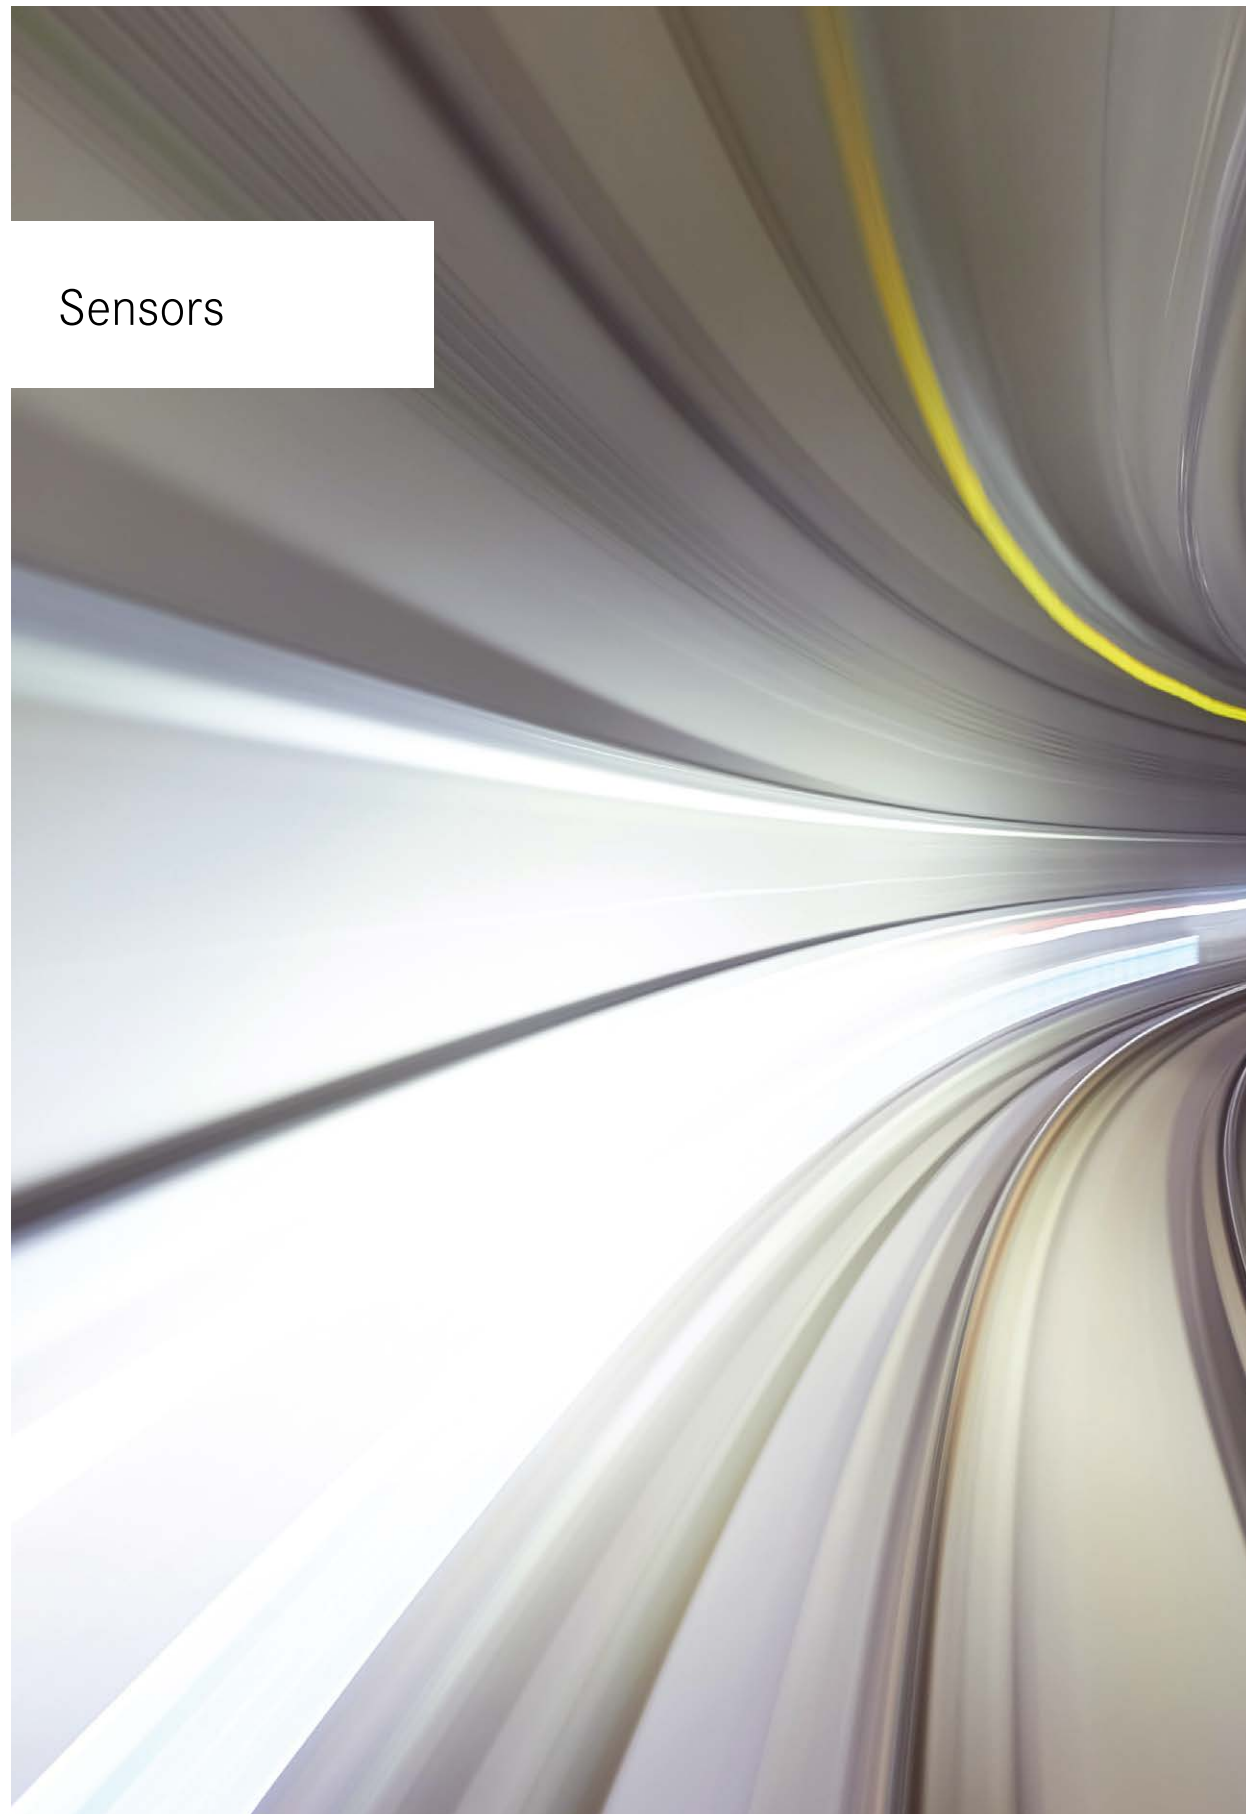

## CANpressure

### Pressure Transducer with CAN Output for Automotive Applications

- ▶ Absolute and relative pressure gauge in the range of 1 ... 250 bar
- ▶ Internal temperature sensor at gauge point
- ▶ Measurement data output to CAN
- ▶ Galvanic isolation (inputs, CAN, supply, enclosure)
- ▶ Designed for engine compartment applications
- ▶ Toolless module to module connection
- ▶ Ruggedized and compact modules for harsh environments

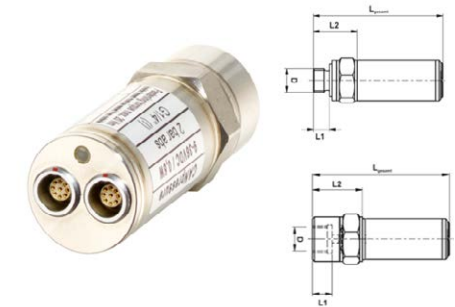


Device	
Overload Pressure	3 x full scale / burst pressure > 200 bar
Channel sampling rates	1 / 2 / 5 / 10 / 20 / 50 / 100 / 200 / 500 / 1000 / 2000 Hz
Oversampling	10 kHz
Aggregate sample rate	2 kHz
Voltage supply	6 ... 36 VDC
Supply voltage thresholds	Switch-on 6 ±0.3 VDC / Switch-off 6 ±0.3 VDC
Power consumption, typical	0.7 W
Working temperature range	-40 ... 125 °C (-40 ... 257 °F)
Storage temperature range	-55 ... 150 °C (-67 ... 302 °F)
IP Code	Relative IP 52 / absolute IP 65 (ISO 20653 - 2013)
Relative humidity	5 ... 95 %
Dimensions	L76 mm x D24 mm (L2.99 in x 0.94 in)
Weight	120 g (0.26 lb)
Configuration interface	CAN high speed
Data transfer rate	Software selectable up to 1 Mbit/s (ISO 11898-2)
Housing material	Stainless steel 4435
Wrench size	24 mm (0.94 in)
Connecting thread	M 10x1 / M 14x1.5 / G¼ / 7/16 UNF / 1/8"NPT (male / female thread)
Tightening torque	17 ... 23 Nm
Thread dimensions M8 (male)	D = 8 mm / L1 = 8.5 mm / L2 = 25.5 mm
Thread dimensions M8 (female)	D = 8 mm / L1 = 9.5 mm / L2 = 26.5 mm
Thread dimensions M10 (male)	D = 10 mm / L1 = 8.5 mm / L2 = 25.5 mm
Thread dimensions M10 (female)	D = 10 mm / L1 = 9.5 mm / L2 = 26.5 mm
Thread dimensions M14 (male)	D = 14 mm / L1 = 9.5 mm / L2 = 25.5 mm
Thread dimensions M14 (female)	D = 14 mm / L1 = 10.5 mm / L2 = 26.5 mm
Thread dimensions 7/16UNF (male)	D = 11 mm / L1 = 10.5 mm / L2 = 25.5 mm
Thread dimensions 1/8"NPT (female)	L1 = 9.5 mm / L2 = 26.5 mm
Thread dimensions G¼ (male)	D = 13.2 mm / L1 = 9.5 mm / L2 = 25.5 mm
Thread dimensions G¼ (female)	D = 13.2 mm / L1 = 10.5 mm / L2 = 26.5 mm



## IPEshunt 3

### Operating Current Measurement via Automotive Fuse Carrier

- ▶ Mounting in Automotive Fuse Carrier
- ▶ Overload Protected up to Factor 1.5 of Rated Current
- ▶ Direct Connection to SENS Modules
- ▶ TEDES Class-2 Integrated for Sensor Scaling
- ▶ Shape: Mini Fuse

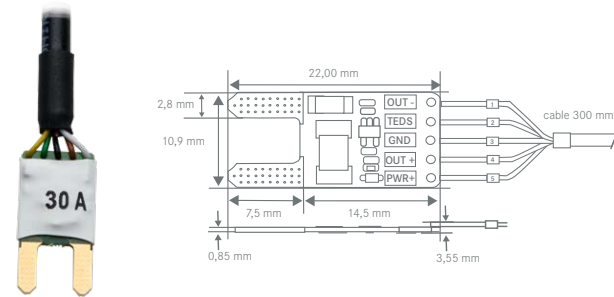

Device	
Voltage Supply	6 ... 15 VDC
Current Consumption	< 4 mA
Working Temperature Range	-40 ... 85 °C (-40 ... 185 °F)
Dimensions	W10.9 mm x H22 mm x D3 mm (0.43 in x 0.87 in x 0.12 in)
Weight	3 g (0.11 oz)
Measurement Range	±10/ 30 A (depending on type)
Operating Current ±10 A	±0 ... 1 V   0.1 V/A
Operating Current ±30 A	±0 ... 1.5 V   0.05 V/A
Offset Deviation at Ambient Temperature 25 °C	±0.04 mV
Accuracy at Ambient Temperature 25 °C	±1 % of reading
Temperature Effect on Accuracy	±250 ppm/K
Overload	Max. 1.5 x Nominal Current (pulse duration max. 1s) Ensure Ventilation, Avoid Thermal Overheating
3 dB Cut-off Frequency	13 kHz (± 500 Hz)



## CANWAY-CW

### Current Clamp with CAN Interface

- ▶ Non-contact Current Measurement for DC Current
- ▶ Measurement Ranges: ±10, 30, 50 A
- ▶ Application According to CAT I (Maximum Voltage 48 V)
- ▶ Configuration with IPEmotion PlugIn CANWAY
- ▶ Designed for Engine Compartment Applications
- ▶ Secure Module-to-Module Connection
- ▶ Rugged and Compact Modules for Harsh Environments



Device	
Channel Sampling Rates	1/ 2/ 5/ 10/ 50/ 100/ 200/ 500/ 1000/ 2000 Hz
Aggregate Sample Rate	2 kHz
Power Supply	9 ... 30 VDC
Power Consumption, typical	0.5 W
Working Temperature Range	-20 ... 110 °C (-4 ... 230 °F)
IP Code	IP 65 (ISO 20653 - 2013)
Dimensions	W38 mm x H21.5 mm x D65 mm (1.50 in x 0.85 in x 2.56 in)
Weight	100 g (0.22 lb)
Configuration Interface	CAN High Speed
Data Transfer Rate	Software Selectable up to 1 Mbit/s (ISO 11898-2)
Housing Material	Metal Housing
Test Cable Diameter, max.	6.1 mm (0.24)
Current Measurement Input	
Measurement Range	±10/ 30/ 50 A
Accuracy	1 % (additionally ± 50 mA relative to range)
Resolution	1 mA
Special Functions	Offset Adjust, During Measurement Temperature Compensation, Remanence Correction Averaging





## IPemotion PC

### The Easiest Form of Data Management

Any hardware is only as good as the software that runs on it. With IPETRONIK's software tools, you have full control over your information and every step of the data acquisition process at all times. From configuration, visualisation, analysis to reporting: we have simplified every step for you.

### Manufacturer-Independent Measurement Data Acquisition

IPemotion supports measurement applications for many areas through special plug-ins - regardless of the hardware used. Likewise, the software easily connects complex ECU applications with high-precision measurement technology for physical quantities. Through customised setup, IPemotion becomes an individual software solution whose data presentation can be flexibly adapted - even during ongoing measurement and data storage. The measurement data acquisition software is available in several languages. It is designed for the acquisition and management of large amounts of data and, in addition to live visualisation, also enables automated evaluation.



*\*This image may differ from original product.*

### One Software for All Applications


Practice-oriented use of measuring equipment and reliable data acquisition are our top priorities. For this purpose, we have developed IPemotion PC - an easy-to-use DAQ software for all applications in the inspection process: perfect for configuration, data recording, analysis and reporting.

- ▶ Thermal Management
- ▶ ECU Software & Bus Validation
- ▶ Brake Tests
- ▶ Compressor Tests
- ▶ Process Monitoring
- ▶ ...and much more

### Thermal Management

Are you concerned with thermal management? Then IPEmotion is the right choice for you: IPEmotion offers you everything from a single source, from simple temperature monitoring as a numerical display to the visualisation of a highly complex heat pump system. Whether you are looking at system components such as vehicle batteries, refrigerant compressors, evaporators or an entire system, our software can provide you with the right solution in just a few clicks.

- ▶ Log p/H diagram display
- ▶ Heatflow matrix display
- ▶ Signal/trend display via y/t diagram
- ▶ Determination of overheating, undercooling, enthalpy etc.
- ▶ REFPROP integration

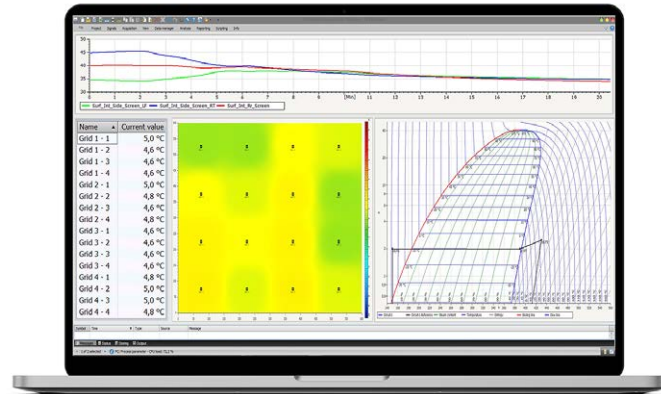


\*This image may differ from original product.

### ECU Software and Bus Validation

With every new vehicle platform and every update of the ECU software, the requirements for the validation of the implemented functions change. IPEmotion offers a variety of easy-to-use tools to accomplish these tasks. With our capabilities to record, display and analyse vehicle buses, we offer you a powerful yet cost-effective software solution.

- ▶ Transmission of freely configurable CAN messages
- ▶ Bus traffic display in decimal and hexadecimal form
- ▶ Bus traffic signal conversion via description file
- ▶ Bus traffic storage and file conversion to ASCII, BLF, MDF
- ▶ ID filter functions and marking of changing data

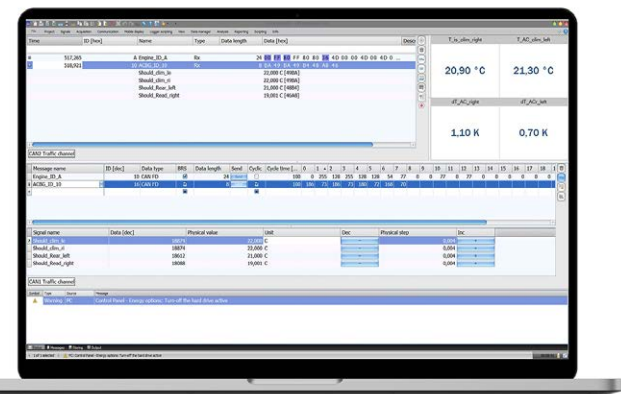


\*This image may differ from original product.

### Brake Tests

With every new vehicle platform and every update of the ECU software, the requirements for the validation of the implemented functions change. IPEmotion offers a variety of easy-to-use tools to accomplish these tasks. With our capabilities to record, display and analyse vehicle buses, we offer you a powerful yet cost-effective software solution.

- ▶ Transmission of freely configurable CAN messages
- ▶ Bus traffic display in decimal and hexadecimal form
- ▶ Bus traffic signal conversion via description file
- ▶ Bus traffic storage and file conversion to ASCII, BLF, MDF
- ▶ ID filter functions and marking of changing data

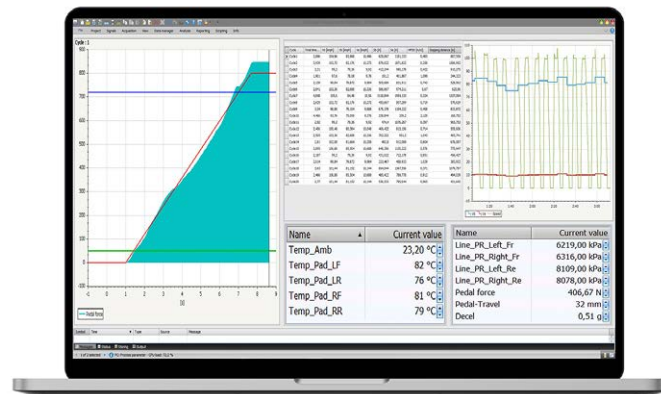

\*This image may differ from original product.

### Compressor Tests

With the advent of e-mobility, many new tasks have arisen around refrigerant compressors. Whether mechanical compressors or electric compressors - with IPEmotion you have all the possibilities to carry out test bench tasks and benchmark investigations or to determine the COP (coefficient of performance).

- ▶ Adjustment of setpoints, e.g. speed via CAN and LIN
- ▶ Display of the high pressure or suction pressure side
- ▶ Comparison of setpoint and actual values
- ▶ Calculation of superheat and subcooling
- ▶ Standard calculations for cooling circuits




\*This image may differ from original product.

### Process Monitoring

Many industrial processes or plants require continuous and highly accurate monitoring. Our IPEmotion software in combination with IPETRONIK measurement technology can take over exactly this task for you. We provide all data at a glance, even in direct overlay with your system image. If a single display page or screen is not enough for your presentation, you can combine as many as you like and take advantage of the full flexibility of our data visualisation.

- ▶ System/plant screen integration
- ▶ Numerical displays
- ▶ Numerous display pages
- ▶ Display distribution across several screens
- ▶ Alarms and limit value monitoring

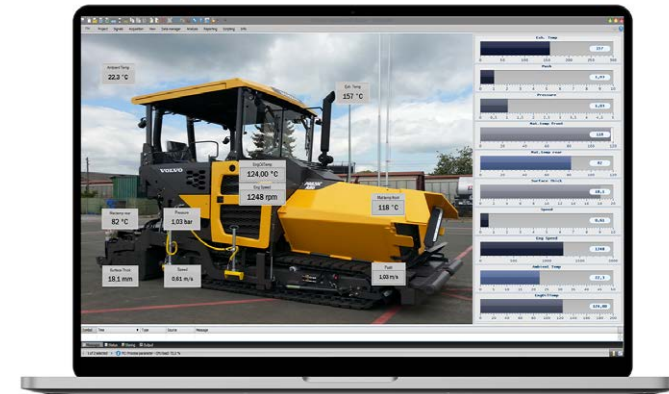

\*This image may differ from original product.

### Fleet Management

In many areas, the fleet test under real conditions is the last approval stage before a product leaves the development department. At this point in the development cycle, as much data as possible is collected as a final safeguard before the pre-series product is handed over to production. In order to be able to sift through, verify and analyse these large amounts of data, IPEmotion offers you various options for data analysis and post-processing.

- ▶ Measurement data management (MDM)
- ▶ File and channel metadata
- ▶ Adaptable/movable x- and y-axes
- ▶ Measurement data overlay
- ▶ Script-based data evaluation



\*This image may differ from original product.



# IPEmotion PC

## Edition Overview

Features	Demo/ Student	Basic	Standard	Professional	Developer	Analysis (offline)
License	Free	Free	■	■	■	■
Supported Plugins	■	■	■	■	■	■
Number of Channels for Live Data	■	250	256	■	■	250
Number of Storage Groups (online)	■	0	2	■	■	0
Number of Display Pages for Online Data	■	20	20	■	■	20
Number of Display Pages for Offline Analysis	■	1	5	■	■	■
Number of Channels for Offline Analysis	■	10	256	■	■	■
Additional Online Tools: Traffic Analyzer, Traffic Simulator, Map	■			■	■	
Additional Offline Tools: Traffic Analyzer, 3D Model, Map, Campbell	■			■	■	■
Macro Recorder - VBS & IronPython Scripting	■			■	■	■
COM Interface - External Access	■		■	■	■	■
Create Runtime Editions					■	
Measurement Data Management (MDM)				■	■	■
Additional Module: Control - Test Sequencing	optional			optional	optional	
Additional Module: Climate - Thermodynamics	optional			optional	optional	optional
Software Maintenance			■	■	■	■

■ = no limitation

# IPEmotion PC

## PlugIn Overview

PlugIn	Description	Hardware	Picture
<b>Automotive</b>			
IPETRONIK-X	Configuration and data acquisition (TEDS, Strain, ICP, Volt, High Voltage, mA, RTD, TC, DIO, PWN, Encoder, of IPETRONIK CAN modules or with X-LINK technology based on XCPonEthernet. With the X-Modules Mx-SENS2 4 FAST and Mx-STG2 6 sample rates up to 100 kHz / channel are supported.	M-SENS2 M-THERMO2 Mx-SENS2 4 FAST etc.	
IPETRONIK-LOG	Configuration and data acquisition for all IPETRONIK data logger series and add-on modules.	IPElog2 FLEETlog2 M-LOG V3	
PROTOCOLS	ECU protocol measurement and calibration based on CCP, XCPonCAN, XCPonETH. Bus traffic analysis CAN, LIN and FlexRay and CAN traffic output simulation. Diagnostics measurements using OBD, WWH-OBD, KWP, GM-LAN, UDS, J1939. Intelligent imports for CAN dbc / XML, LDF, Fibex, FlexRay, Autosar, A2L und GM-LAN description files.	IPETRONIK Vector Kvaser Peak NI Softing TRAMA ICS-CAN Drewtech I+ME Actia Ethernet	 IPEhub2 (LAN & WiFi CAN Card)
PCAN-USB PRO LIN	LIN bus measurement with configuration as master, slave or listener. Signals are imported via .LDF description file.	IPEcan FD Pro	
CAETEC dataLog	Configuration and data recording for CAETEC data logger.	ETHOS ARCOS 1.5 µCROS Series	
CANWAY	Current clamp. Configuration and data output via CAN bus.	CW-401 MKII	
<b>Other</b>			
GPS	Recording GPS data based on the NMEA standard protocol.	GPS receiver based on NMEA standard	
VIDEO	Recording of video data in IPEmotion from USB web cams and IP cameras with the Real Time Streaming Protocol.	USB and IP cameras	

Find more Plugins here: <https://www.ipetronik.com/en/products-services/software-digitalization/plugins.html>

# IPEmotion ME (Mobile Edition)


## Wireless Data Logger Display

- ▶ Display System for All Data Loggers with IPEmotion RT
- ▶ Free Display Configuration via Apps or Web Browser
- ▶ Cross-Platform Technology for Android and iOS Devices
- ▶ Display Configuration with IPEmotion RT.UI
- ▶ Set Alphanumerical Variables on Logger
- ▶ Multi-Tablet Operation and Logger Remote-Control Function
- ▶ Worldwide Access to Online Data via IoT Technology
- ▶ Available Free of Charge from Google Play Store/Apple App Store



\*This image may differ from original product.

IPEmotion ME (Mobile Edition)	
Supports IPEmotion RT Data Loggers	IPElog2, M-LOG V3, $\mu$ CROS SL
Android Version	7.0
iOS Version	11.3
Screen Resolution	800 x 480 / 1280 x 720 (recommended)
Languages	German / English
Software Functions	
	Map
	yt-Chart
	Alphanumerical
	LED
	Barchart
Instruments	Tachometer
	Table
	Video
	Switch
	Slide Control
	Parameter Input
	Audio Marker
Instrument configuration functions	Copy/Paste Page Layouts
	Add/Delete Channels
	yt-Chart Time Axis 30 s ... 180 min
	yt-Chart Line Color / Thickness
	Multiple y-Axis / Separate Coordinate Systems
	Night Shift Mode
Functions	Live Data Tracking and Remote Control (IoT)
	Event Control on Logger
	Write Outputs
	Multi-Tablet Operation
	Add Marker Comments to Data Files
Security	Encrypted Data Transfer WPA2
	No Data Storage on Mobile Devices

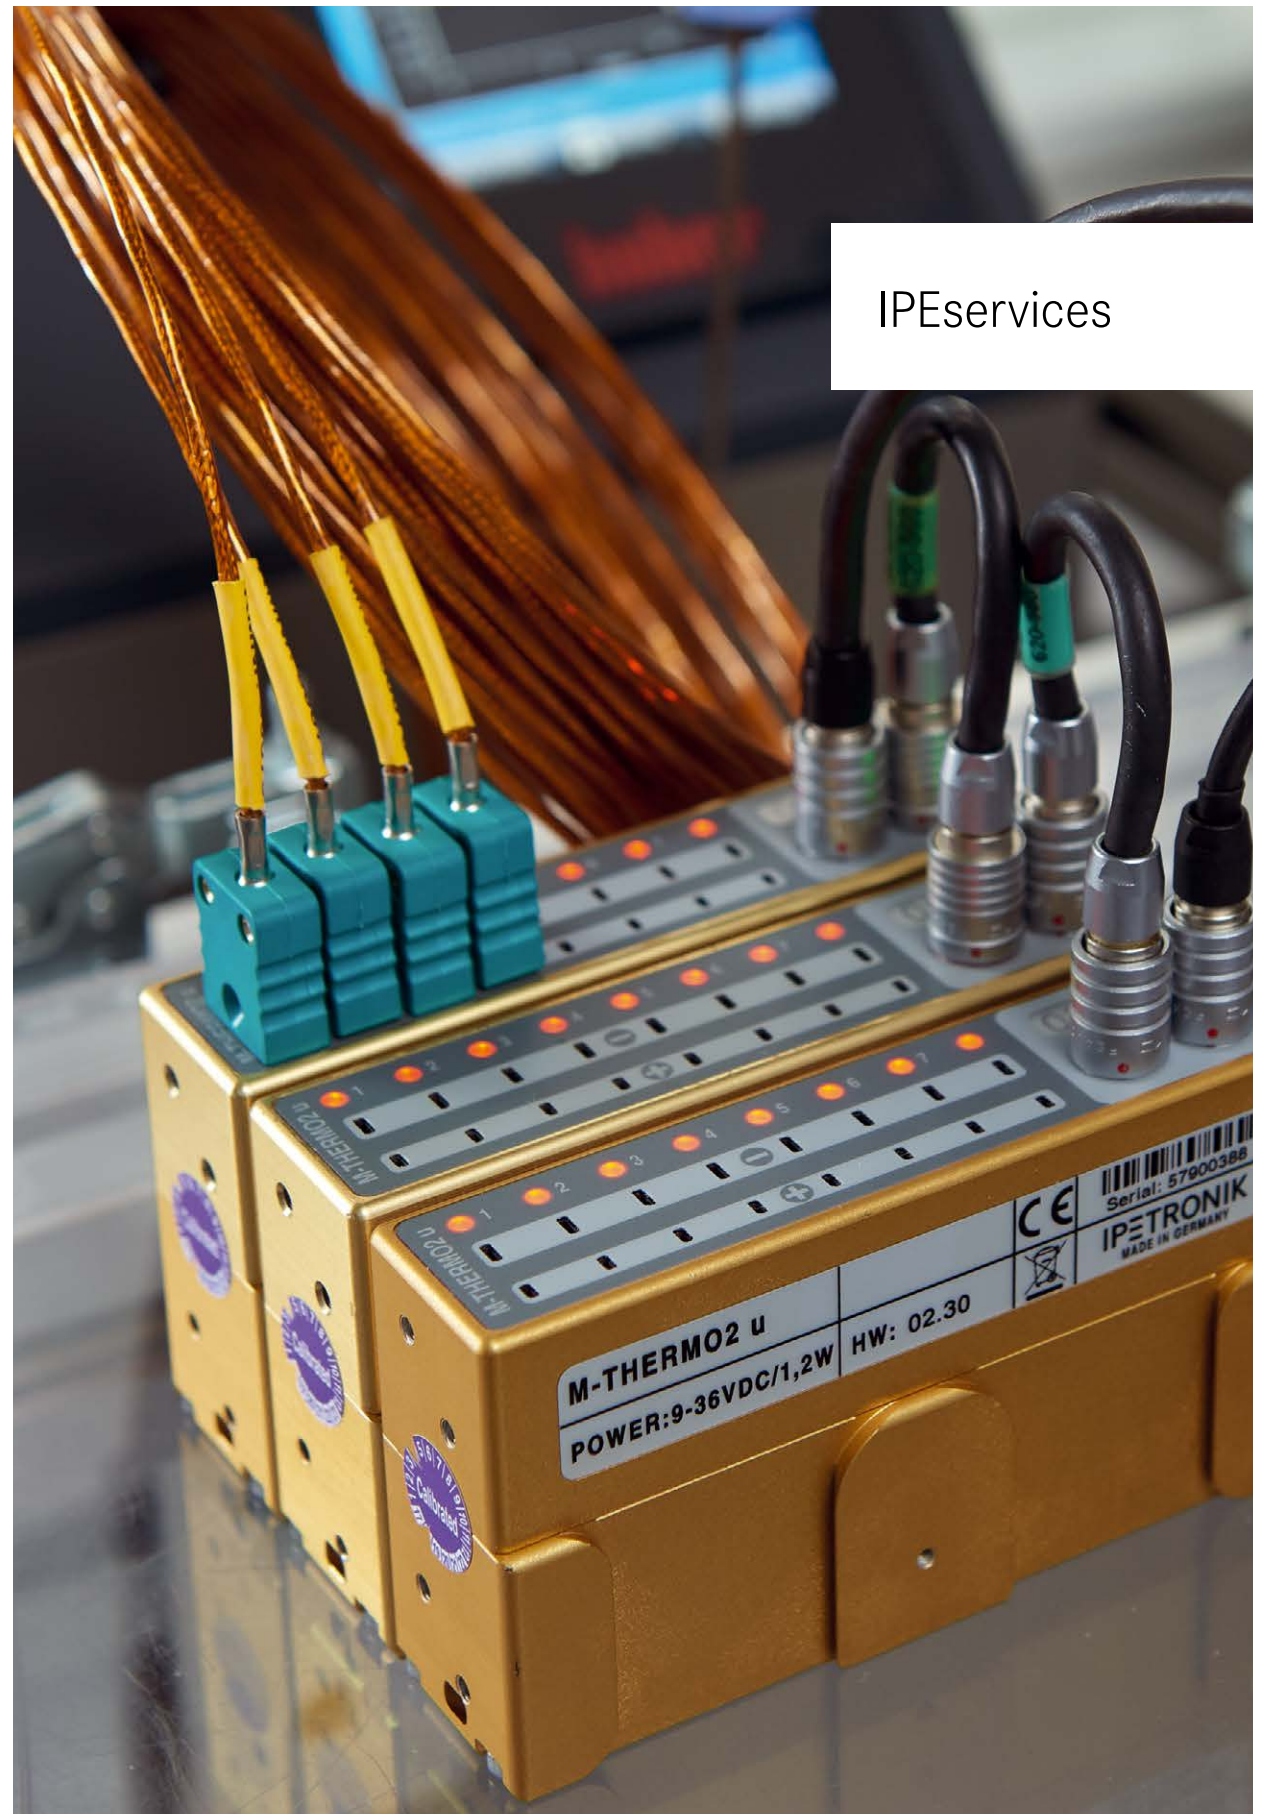

IPEservices



## Quality Campaign Loggers and Modules

Extend your warranty and keep your equipment precise and working as it should.

### Why are Maintenance and Calibration Important?

Extreme operating conditions, such as hot and cold climate testing as well as fleet testing in climate chambers and on test benches, stress the electric components of measurement modules and data loggers. Regular maintenance, calibration, and adjustment of the measuring equipment is crucial to ensure the precision of the devices.

### When Do You Need Maintenance or Calibration?

- ▶ New Device
- ▶ Modification or Repair
- ▶ End of Service Life (Operating Hours)
  - ▶ **Recommendation:** Maintenance/Calibration Once A Year, Adjustment Every Two Years
- ▶ Crucial Measurement – Before And/Or After
- ▶ Unforeseen Events, Such As Damage
- ▶ Compliance with Standards, Such As DIN EN ISO 9001

### IPEServices – Maintenance Packages

IPEServices offers the following well-proven maintenance packages. If required, customized packages can be tailored.

	Maintenance Packages				
	Basic	Standard	Premium	Repair with Premium Calibration	Calibration acc. to ISO 17025
Calibration at Various Measurement Points and Room temperature (23 °C)	■	■	■	■	■
Calibration at Various Measurement Points and Extreme Ambient Temperatures			■	■	
Adjustment at Room Temperature (23 °C)		■	■	■	As required
Firmware Update	■	■	■	■	■
Calibration Date Update in Device Firmware		■	■	■	■
Testing of Device-specific Functions, e.g. Sensor Excitation, Filters		■	■	■	■
Calibration Certificate	■	■	■	■	■
Calibration Tag for the Device	■	■	■	■	■
Calibration Data Exchange according to VDI/VDE 2623 After Consultation (testing required)		■	■	■	■
Warranty Renewal for 12 Months Following the Calibration			■	■	
Initial Inspection for Mechanical Damage			■	■	■
Hardware Repair				■	
Pick-up and Delivery Service upon Request	Optional	Optional	Optional	Optional	Optional







Do you have any questions  
about a specific application?

Our experts will be pleased to  
provide you with personal advice.  
Simply e-mail [sales@ipetronik.com](mailto:sales@ipetronik.com)  
or call +49 (0) 7221 9922 222.



## Contact

### Important Contact Information

## IPETRONIK

**IPETRONIK GmbH & Co. KG**  
France, Spain

Great Britain, Scotland, Ireland, Sweden

**Jorge Pires Morais**  
P +33 (0)185 471 002  
E [jorge.piresmorais@ipetronik.com](mailto:jorge.piresmorais@ipetronik.com)

**Greg Todd**  
P +44 (0)7789 145 755  
E [greg.todd@ipetronik.com](mailto:greg.todd@ipetronik.com)

**IPETRONIK India Private Limited**  
India

**Kannan Chandrasekar**  
No. 20, 6th Floor, Unit No. 603, Brigade Rubix Building,  
Watch Factory Road, HMT Main Road, Yeshwanthpur  
Bangalore 560022, India

P +91 80 4122 2271  
E [kannan.chandrasekar@ipetronik.com](mailto:kannan.chandrasekar@ipetronik.com)

**Technical Support**  
P +49 7221 9922 333  
E [support@ipetronik.com](mailto:support@ipetronik.com)  
W [customer.ipetronik.com](http://customer.ipetronik.com)

**IPETRONIK GmbH & Co. KG**

Im Rollfeld 28 | 76532 Baden-Baden | Germany

P +49 7221 9922 0 | E [info@ipetronik.com](mailto:info@ipetronik.com) | [www.ipetronik.com](http://www.ipetronik.com)

